



Submersible Dewatering Pumps

0.5 and 1 Horsepower



DESCRIPTION

Gorman-Rupp electric submersible dewatering pumps are lightweight, portable, reliable, and energy efficient. The clog resistant impeller is designed for dirty water.

Applications include: sump pumps, basements, construction, drainage, dewatering, waste water treatments, agricultural irrigation, flooding and other applications requiring clear/drainage water removal.

Motors are rated continuous duty 115VAC @ 60 Hz with standard cord/plug and have automatic thermal overload protection. Pumps are designed to handle liquids with solids content or dissolved solids and debris.

PUMP SPECIFICATIONS

Basic Construction: Cast Iron with SST Motor Hsg.

Motor Speed: 3450 RPM.

Power Cable Length: 20 ft. (6 m).

Impeller: Cast Iron

Seal: 0.50 HP Models Ceramic/Carbon Mechanical plus shaft seal.

1.0HP Models Dual Ceramic/Carbon Mechanical plus shaft seal.

Strainer: 0.50 HP Models Polypropylene. 1.0 HP Models Stainless Steel.

Built-in Carry Handle

UL/CSA LISTED

Maximum Temperature: 104°(40C)

Automatic Float Switch: Model SE2N3-E.5 115/1 W Only



SE2N3-E.5 115/1



SE2N3-E.5 115/1 W

WARNING!

Do not use in explosive atmosphere or for pumping volatile flammable liquids.

SPECIFICATIONS							
Model	Ship Wt. (Approx.)	Disch. (NPT)	VAC/ Phase	H.P.	Hz	Amps	Max Solids Dia
SE2N3-E.5 115/1 W	24 lbs. 10,9 kg.	2"	115/1	0.5	60	7.5	5/32 (3,9mm)
SE2N3-E.5 115/1	26 lbs. 11,8 kg.	2"	115/1	0.5	60	7.5	5/32 (3,9mm)
SE2P3-E1 115/1	46 lbs. 20,9 kg.	2"	115/1	1	60	13	5/32 (3,9mm)
SE3A3-E1 115/1	55 lbs. 25,0 kg.	3"	115/1	1	60	13	7/32 (5,5mm)



GORMAN-RUPP PUMPS

www.grpumps.com


Specifications Subject to Change Without Notice

Printed in U.S.A.


Specification Data

SECTION 130, PAGE 170

APPROXIMATE DIMENSIONS

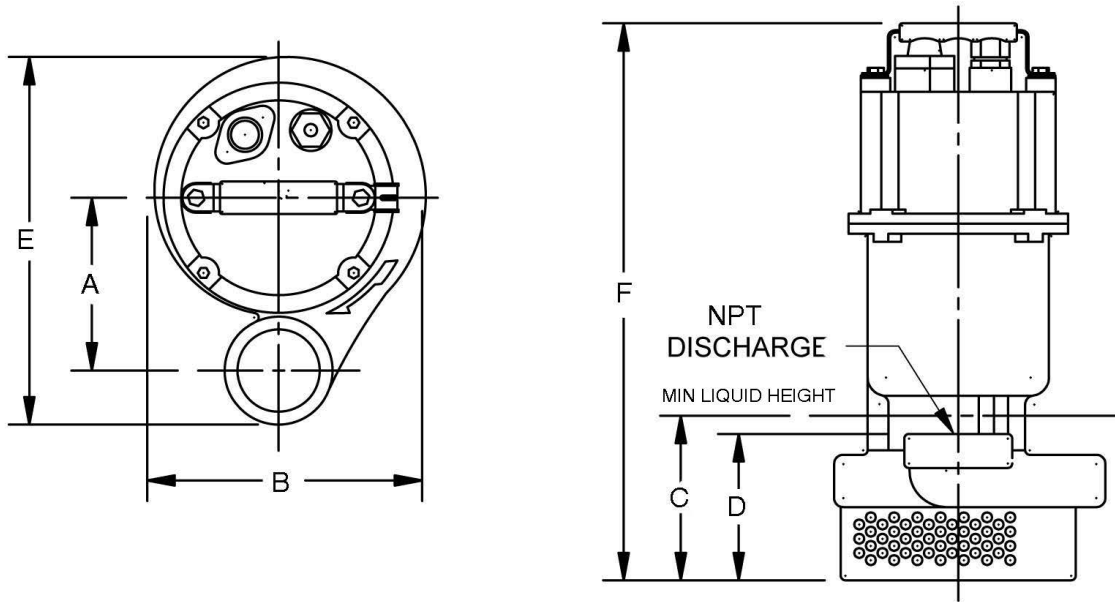

Model	DIMENSIONS					
	INCH (MM)					
	A	B	C	D	E	F
SE2N3-E.5 115/1 W	4.2 (106,7)	5.7 (144,8)	5.0 (127,0)	3.8 (96,5)	8.3 (210,8)	15.0 (381,0)
SE2N3-E.5 115/1	4.2 (106,7)	5.7 (144,8)	5.0 (127,0)	3.8 (96,5)	8.3 (210,8)	15.0 (381,0)
SE2P3-E1 115/1	5.3 (134,6)	7.8 (198,1)	6.0 (152,4)	4.6 (116,8)	10.8 (274,3)	17.5 (444,5)
SE3A3-E1 115/1	6.0 (152,4)	7.5 (190,5)	7.0 (177,8)	5.9 (149,9)	11.8 (299,7)	18.8 (477,5)

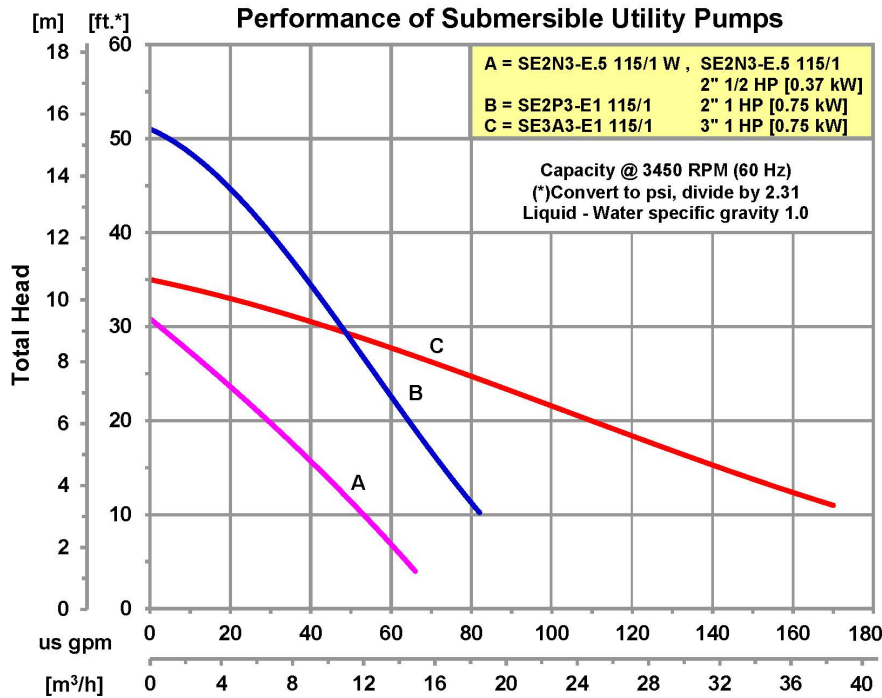

GORMAN-RUPP PUMPS

www.grpumps.com

Specifications Subject to Change Without Notice

Printed in U.S.A.