

Electric Motor Driven,
Stainless Steel

Submersible Pump

Model S4H65-E10

Size 4"



PUMP SPECIFICATIONS

- Diffuser:** Stainless Steel CD4MCu;
Maximum Operating Pressure 147 psi (1014 kPa).*
- Impeller:** Stainless Steel CD4MCu.
- Wear Plate:** Stainless Steel CD4MCu.
- Seal Plate:** Stainless Steel CD4MCu.
- Intermediate:** Stainless Steel 316.
- Casing:** Stainless Steel 316.
- Motor Housing:** Stainless Steel 316.
- Motor Shaft:** Stainless Steel 316.
- Shaft Sleeve:** Stainless Steel 316.
- Bearings:** Upper - Open Single Row Ball Bearing.
Lower - Two Synthetic Seals, Double Row Ball Bearing.
- Discharge Flange:** Stainless Steel 316.
- Gaskets:** Buna-N with Compressed Synthetic Fiber.
- O-Rings:** Fluorocarbon (DuPont Viton[®] or Equivalent).
- Wetted Hardware:** Stainless Steel 316.
- Strainer:** Stainless Steel 316; 50.6% Open Area,
0.375" (9,5 mm) Diameter Openings.
- Hoisting Bail:** Stainless Steel 316.

Standard Equipment

NEMA Type 3R Rainproof Control Box. (See Section 130, Page 90.)

Provides On-Off, Circuit Breaker and Motor Overload Protection.

Optional Equipment

Liquid Level Control: (See Sec. 130, Page 150.)

- a. Turtle Type Pressure Activated Level Switch.
- b. Float Activated Level Switch.

Staging Adapter Kit.

MOTOR/CABLE SPECIFICATIONS

Motor: Oil Filled Enclosure; 10.0 H.P.; 3450 R.P.M.; Three Phase: 460/575 Volt, 60 Hz, 18/14.4 Full Load AMPS, 13.45 kW (Max.)

Power Cable: CPE/CSPE Jacket, Type GGC; 6 Wire; 8 AWG.
3 Power Conductors, 2 Ground Conductor and 1 Ground Check.
Nominal Length 50 Feet (15 m). Standard.
(Specify Alternate Length at Time of Order.)



Recommended Generator Size: 15 kW Across the Line Start.

* Consult Factory for Applications Exceeding Maximum Pressure and/or Temperature Indicated.



WARNING!

Do not use in explosive atmosphere or for pumping volatile flammable liquids.

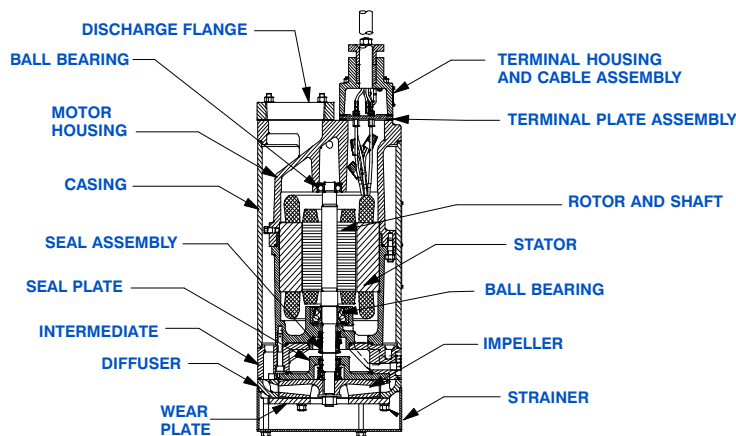

SEAL DETAIL

Tandem, Oil Lubricated.

Upper Seal: Type 21, Mechanical. Carbon Rotating Face. Ceramic Stationary Face. Buna-N Elastomers. Stainless Steel 18-8 Cage and Spring.

Lower Seal: Type 2, Mechanical. Silicon Carbide Rotating and Stationary Faces. Fluorocarbon Elastomers (DuPont Viton[®] or Equivalent). Stainless Steel 303/304 Cage and Spring. Maximum Temperature of Liquid Pumped, 122°F (50°C).*



GORMAN-RUPP PUMPS

www.grpumps.com

Specifications Subject to Change Without Notice

Printed in U.S.A.



Specification Data

SECTION 130, PAGE 1020

APPROXIMATE
DIMENSIONS and WEIGHTS

NET WEIGHT:
SHIPPING WEIGHT:
EXPORT CRATE:

242 LBS. (110 KG.)
257 LBS. (117 KG.)
12.5 CU. FT. (0,35 CU. M.)

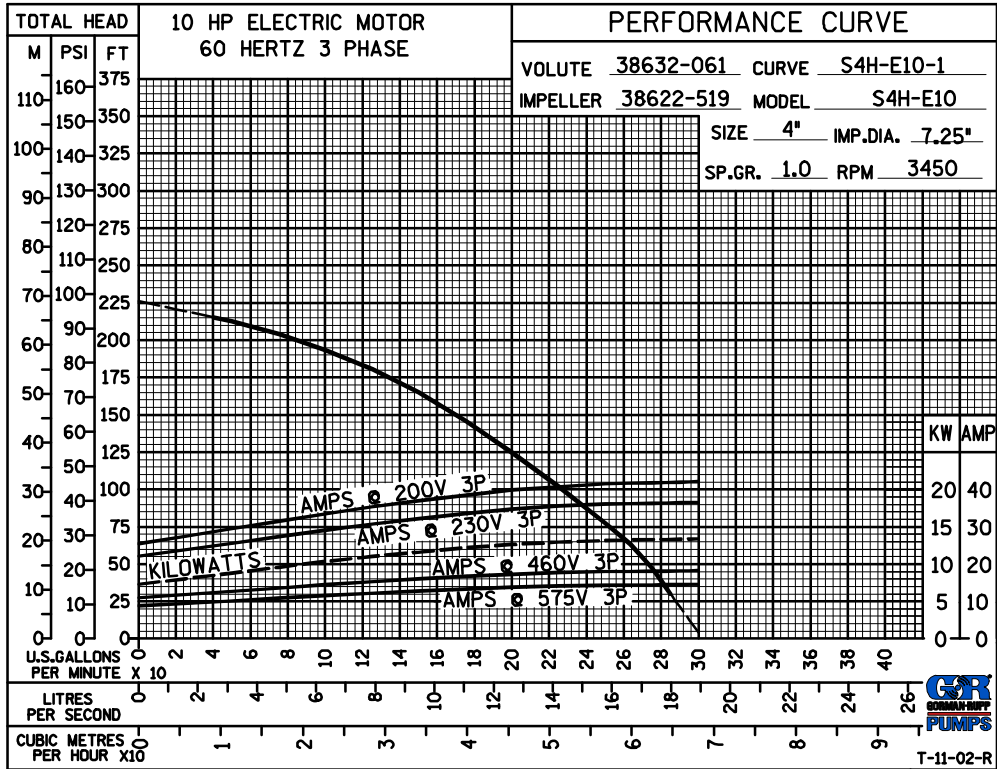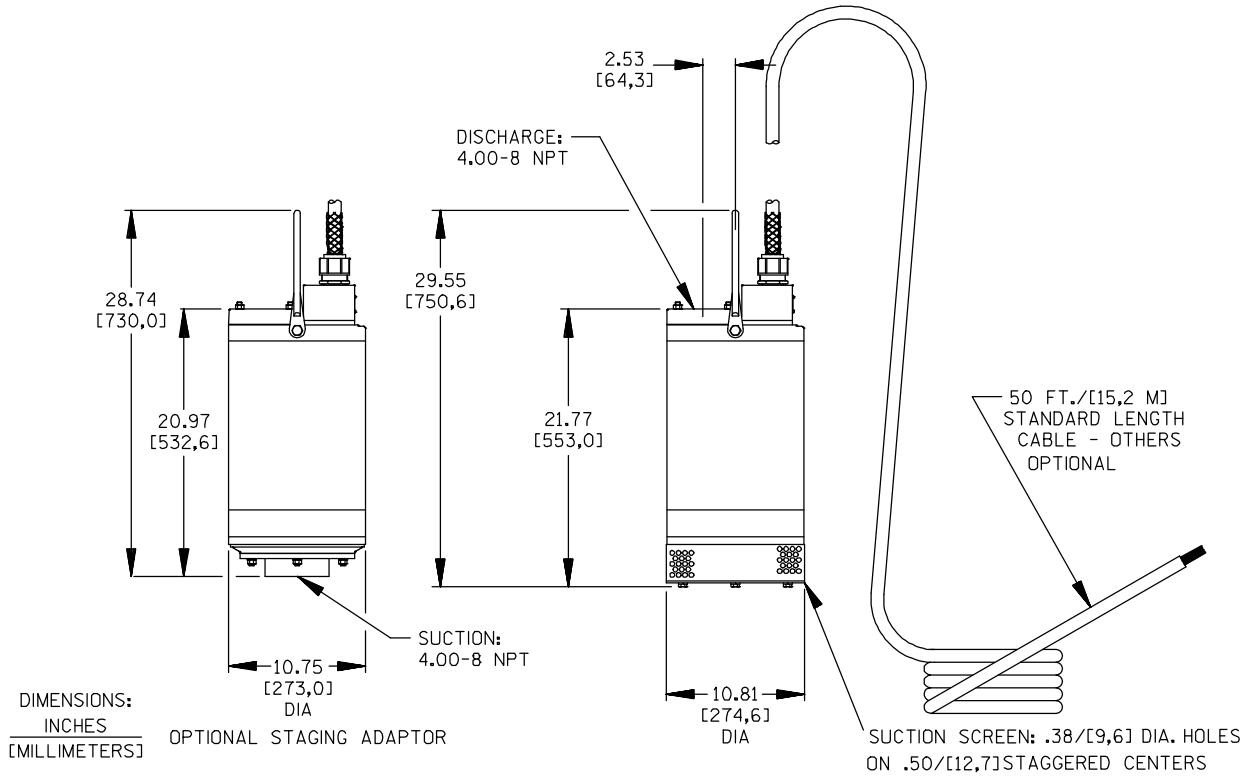

GORMAN-RUPP PUMPS

www.grpumps.com

Specifications Subject to Change Without Notice

Printed in U.S.A.