

TOTAL HEAD

REPRIMING LIFTS								
RPM	650	750	850	950	1050	1150	1250	1350
FEET	9	12	15	17	20	21	22	23
METERS	2,7	3,7	4,6	5,2	6,1	6,4	6,7	7

PERFORMANCE CURVE


VOLUTE 38224-705 CURVE T8A-B-3  
 IMPELLER 12349 MODEL T8A-B

Note:  
 Select performance within  
 operating range of curve.

SIZE 8"X8" IMP.DIA. 14.75"  
 SP.GR. 1.0 RPM NOTED

Consult factory on operating conditions  
 above 1200 rpm when TDSL exceeds 20 ft.

Figure NPSH required prior to using above table.  
 DO NOT use as available Suction Lifts.  
 3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

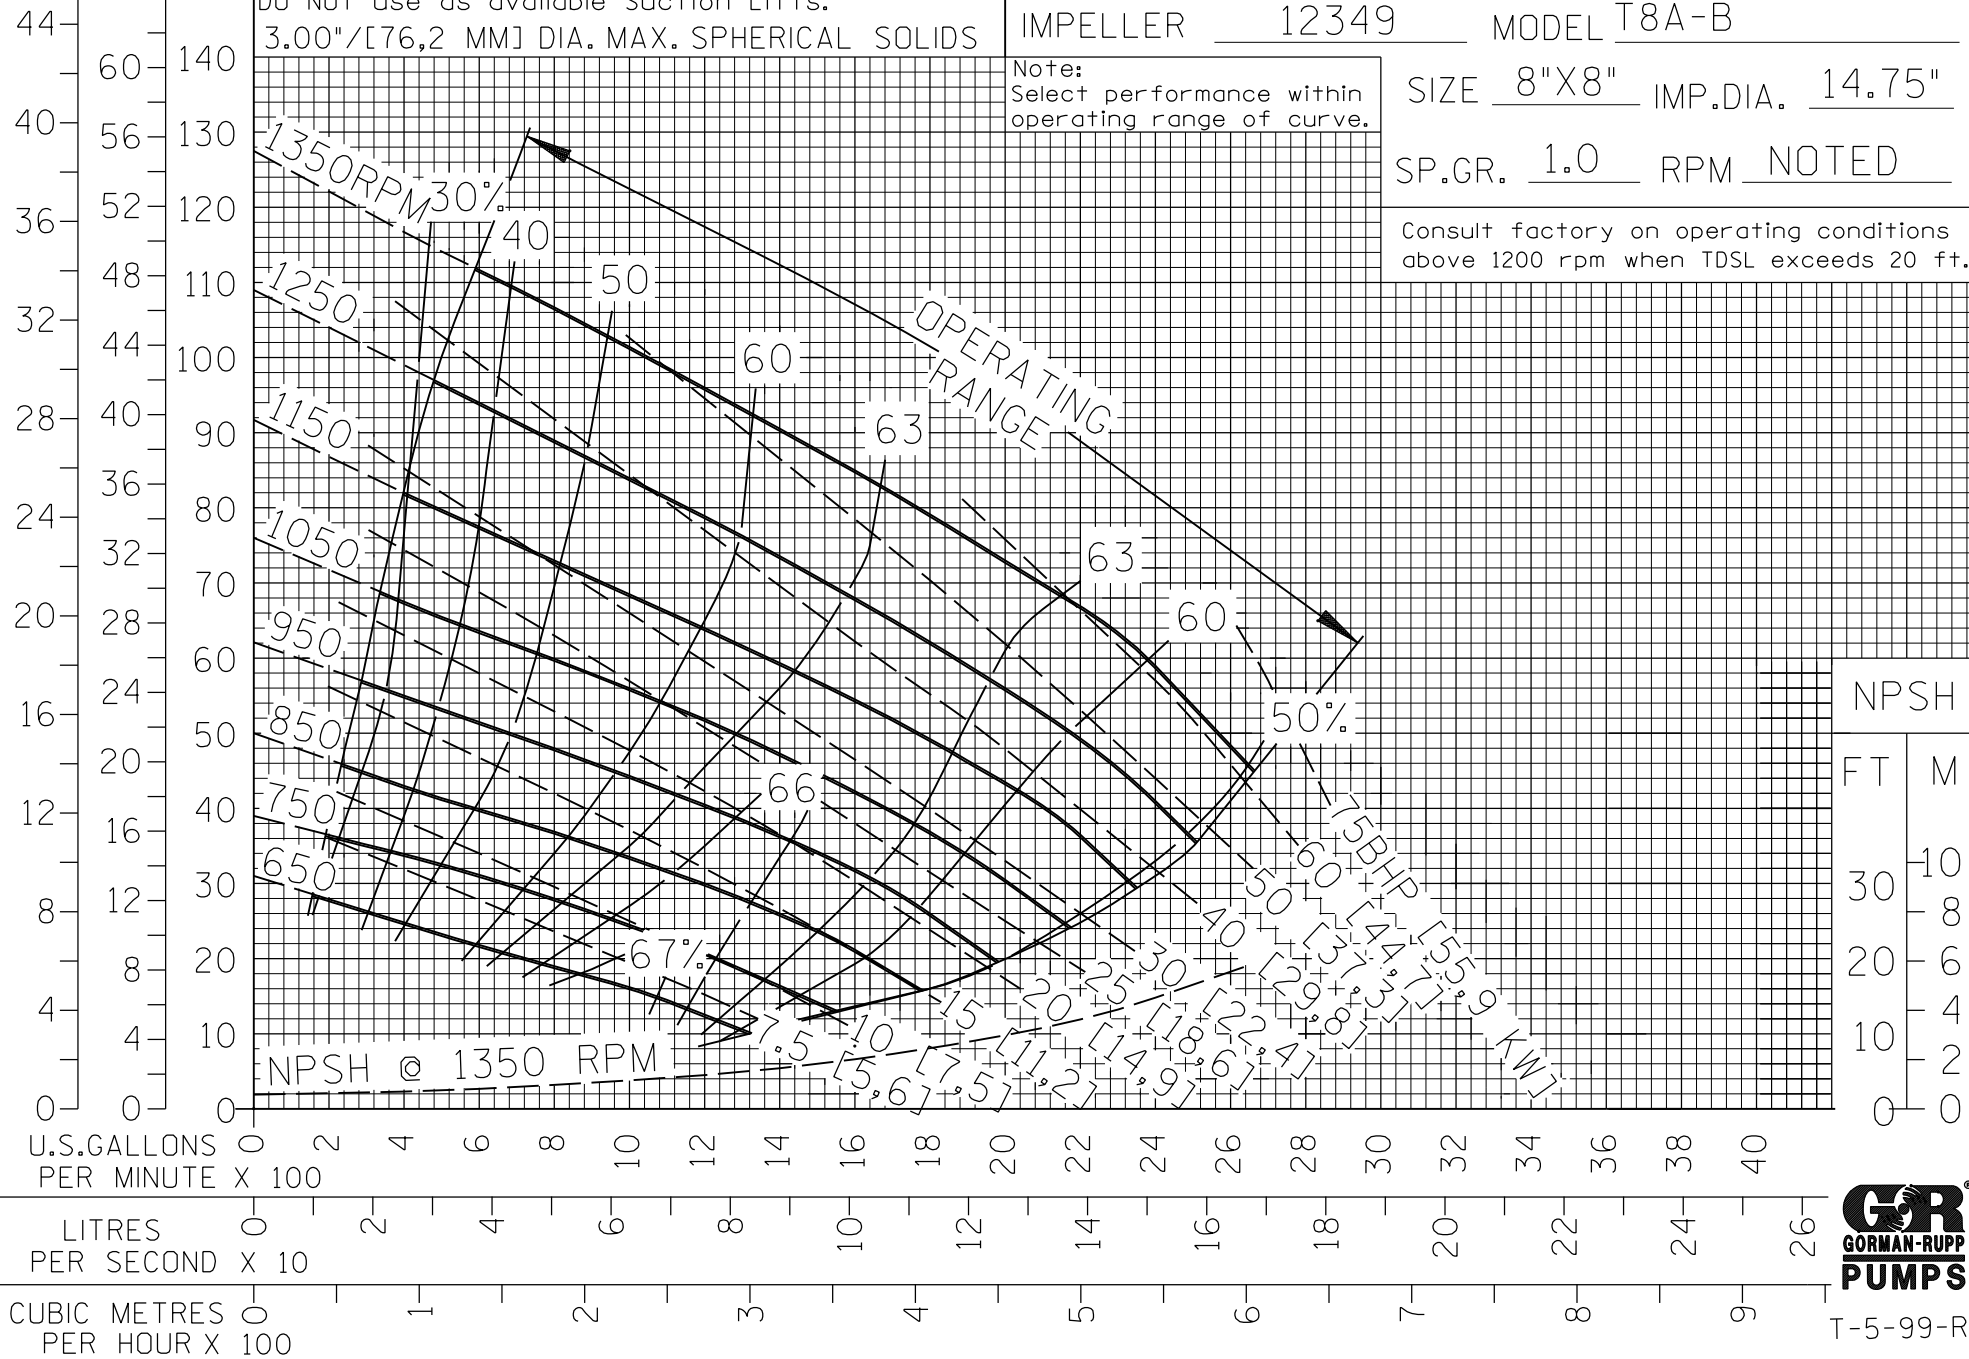

FILE NO. +8ab.s03

NPSH  
 FT M  
 30 10  
 20 6  
 10 4  
 0 0



T-5-99-R