

TOTAL HEAD

2.50"/[63,5 MM] DIA. MAX. SPHERICAL SOLIDS
 CURVE FOR SERIES APPLICATION ONLY &
 SHOULD NOT BE USED FOR SINGLE PUMP
 PERFORMANCE

PERFORMANCE CURVE

VOLUTE 11405D
11405B CURVE T3A-B-12


IMPELLER 11406 MODEL T3A-B

Performance shown does not
 include any interconnecting piping

SIZE 3"X3" IMP.DIA. 8.75"

SP.GR. 1.0 RPM NOTED

NOTE: Series operation is limited by the operating
 pressure & NPSH requirement of a single pump.
 See single pump curve for NPSH, EFF., & HP.

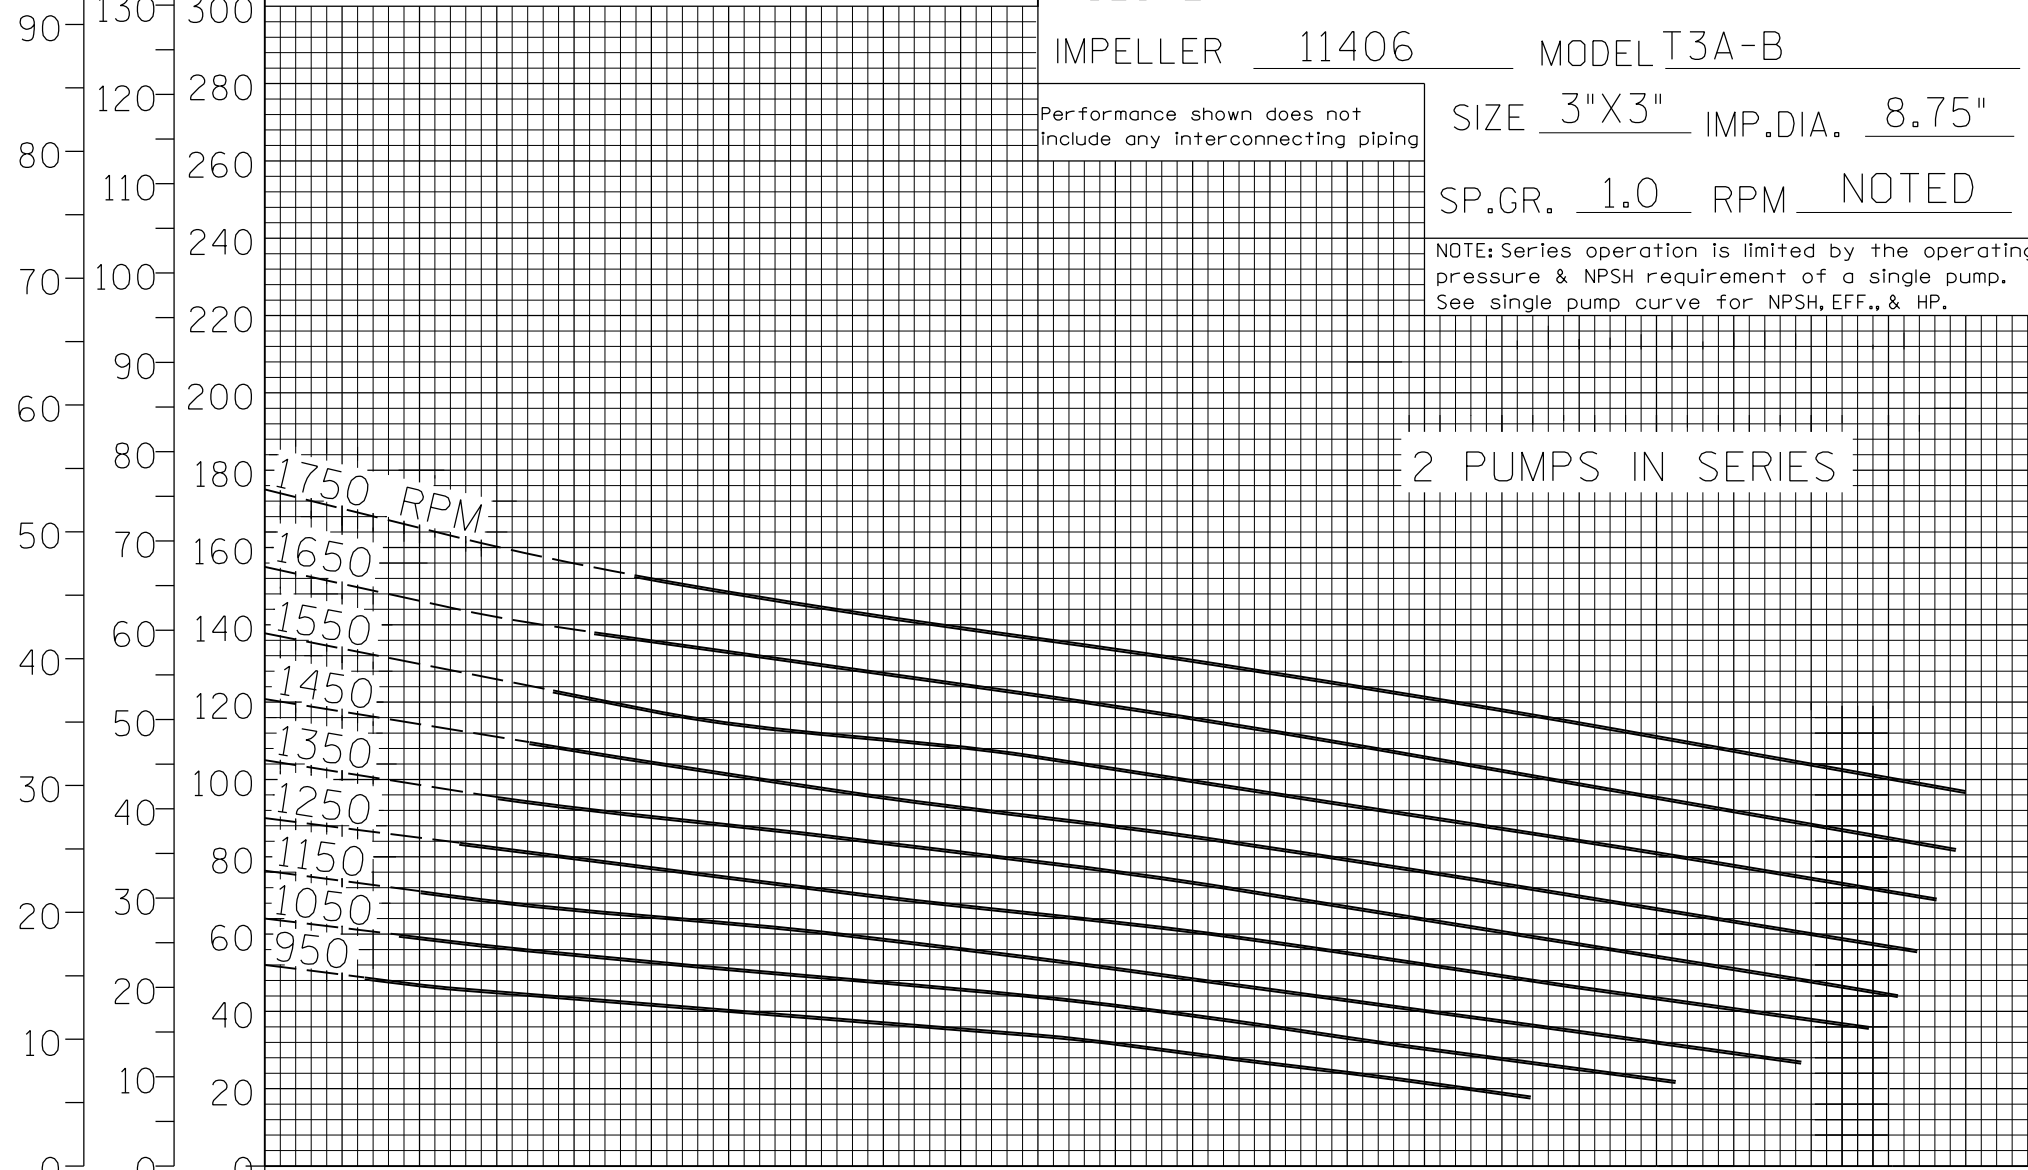

2 PUMPS IN SERIES

U.S. GALLONS PER MINUTE X 10
 LITRES PER SECOND
 CUBIC METRES PER HOUR X 10



C-6-08-R

FILE NO. +3ab.s12