

TOTAL HEAD

REPRIMING LIFTS

DIA.	11"	11.25"	11.50"	11.75"-12"	12.38"
FEET	16	17	18	20	23
METERS	4,9	5,2	5,5	6,1	7

Figure NPSH required prior to using above table. DO NOT use as available Suction Lifts. 3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE


VOLUTE 10957E
 10957C CURVE T6A-B-10
 38615-087
 IMPELLER 10958 MODEL T6A-B

Note:
 Select performance within operating range of curve.

SIZE 6"X6" IMP.DIA. NOTED

SP.GR. 1.0 RPM 1450

Consult factory on operating conditions above 1350 rpm when TDSL exceeds 20 ft.

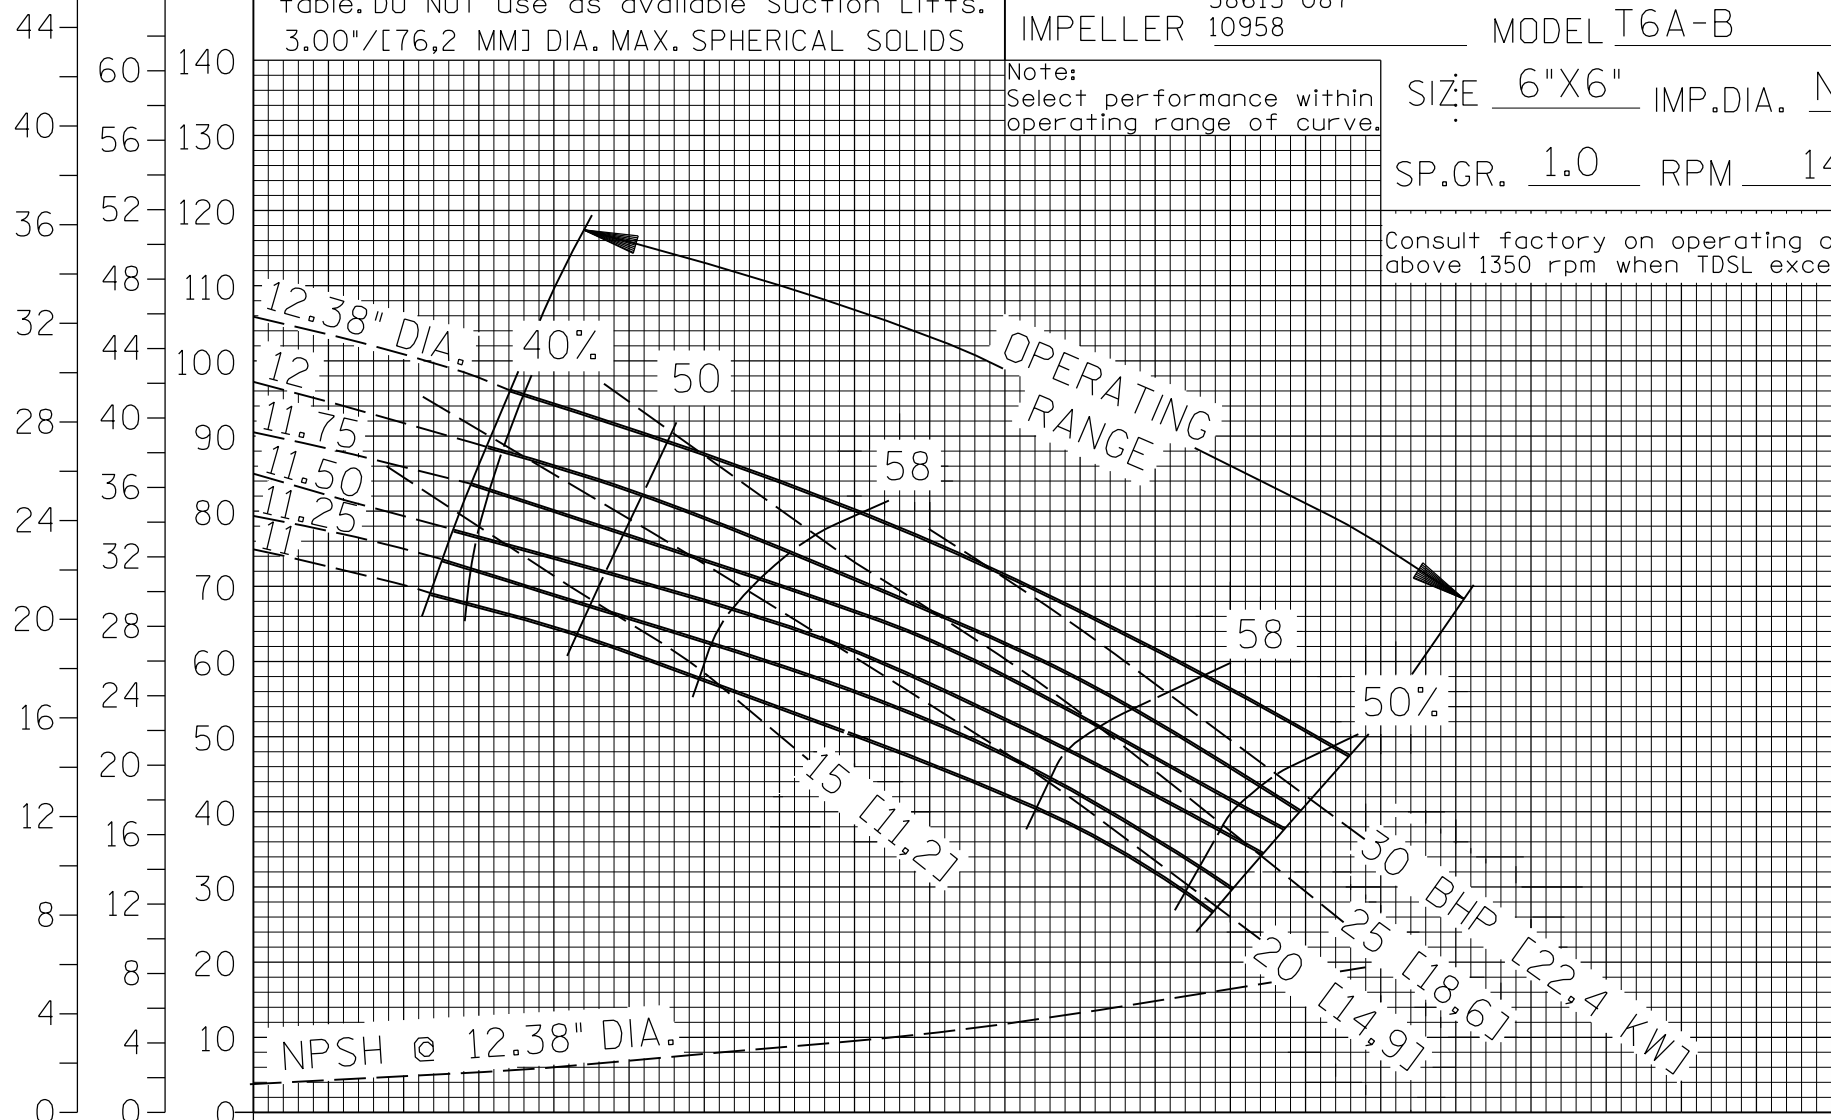

NPSH	
FT	M
30	10
20	6
10	3
0	0

U.S.GALLONS PER MINUTE X 100

LITRES PER SECOND X 10

CUBIC METRES PER HOUR X 10



T-8-09-R