

TOTAL HEAD

REPRIMING LIFTS

PERFORMANCE CURVE

DIA.	11"	11.25"	11.50"	11.75"	12"	12.38"
FEET	8	9	10	11	12	14
METERS	2,4	2,7	3,1	3,4	3,7	4,3

VOLUTE 10957E
 10957C CURVE T6A-B-11
 38615-087
 IMPELLER 10958 MODEL T6A-B


Note:
 Select performance within
 operating range of curve.

SIZE 6"X6" IMP.DIA. NOTED
 SP.GR. 1.0 RPM 950

Consult factory on operating conditions
 above 1350 rpm when TDSL exceeds 20 ft.

Figure NPSH required prior to using above
 table. DO NOT use as available Suction Lifts.

3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

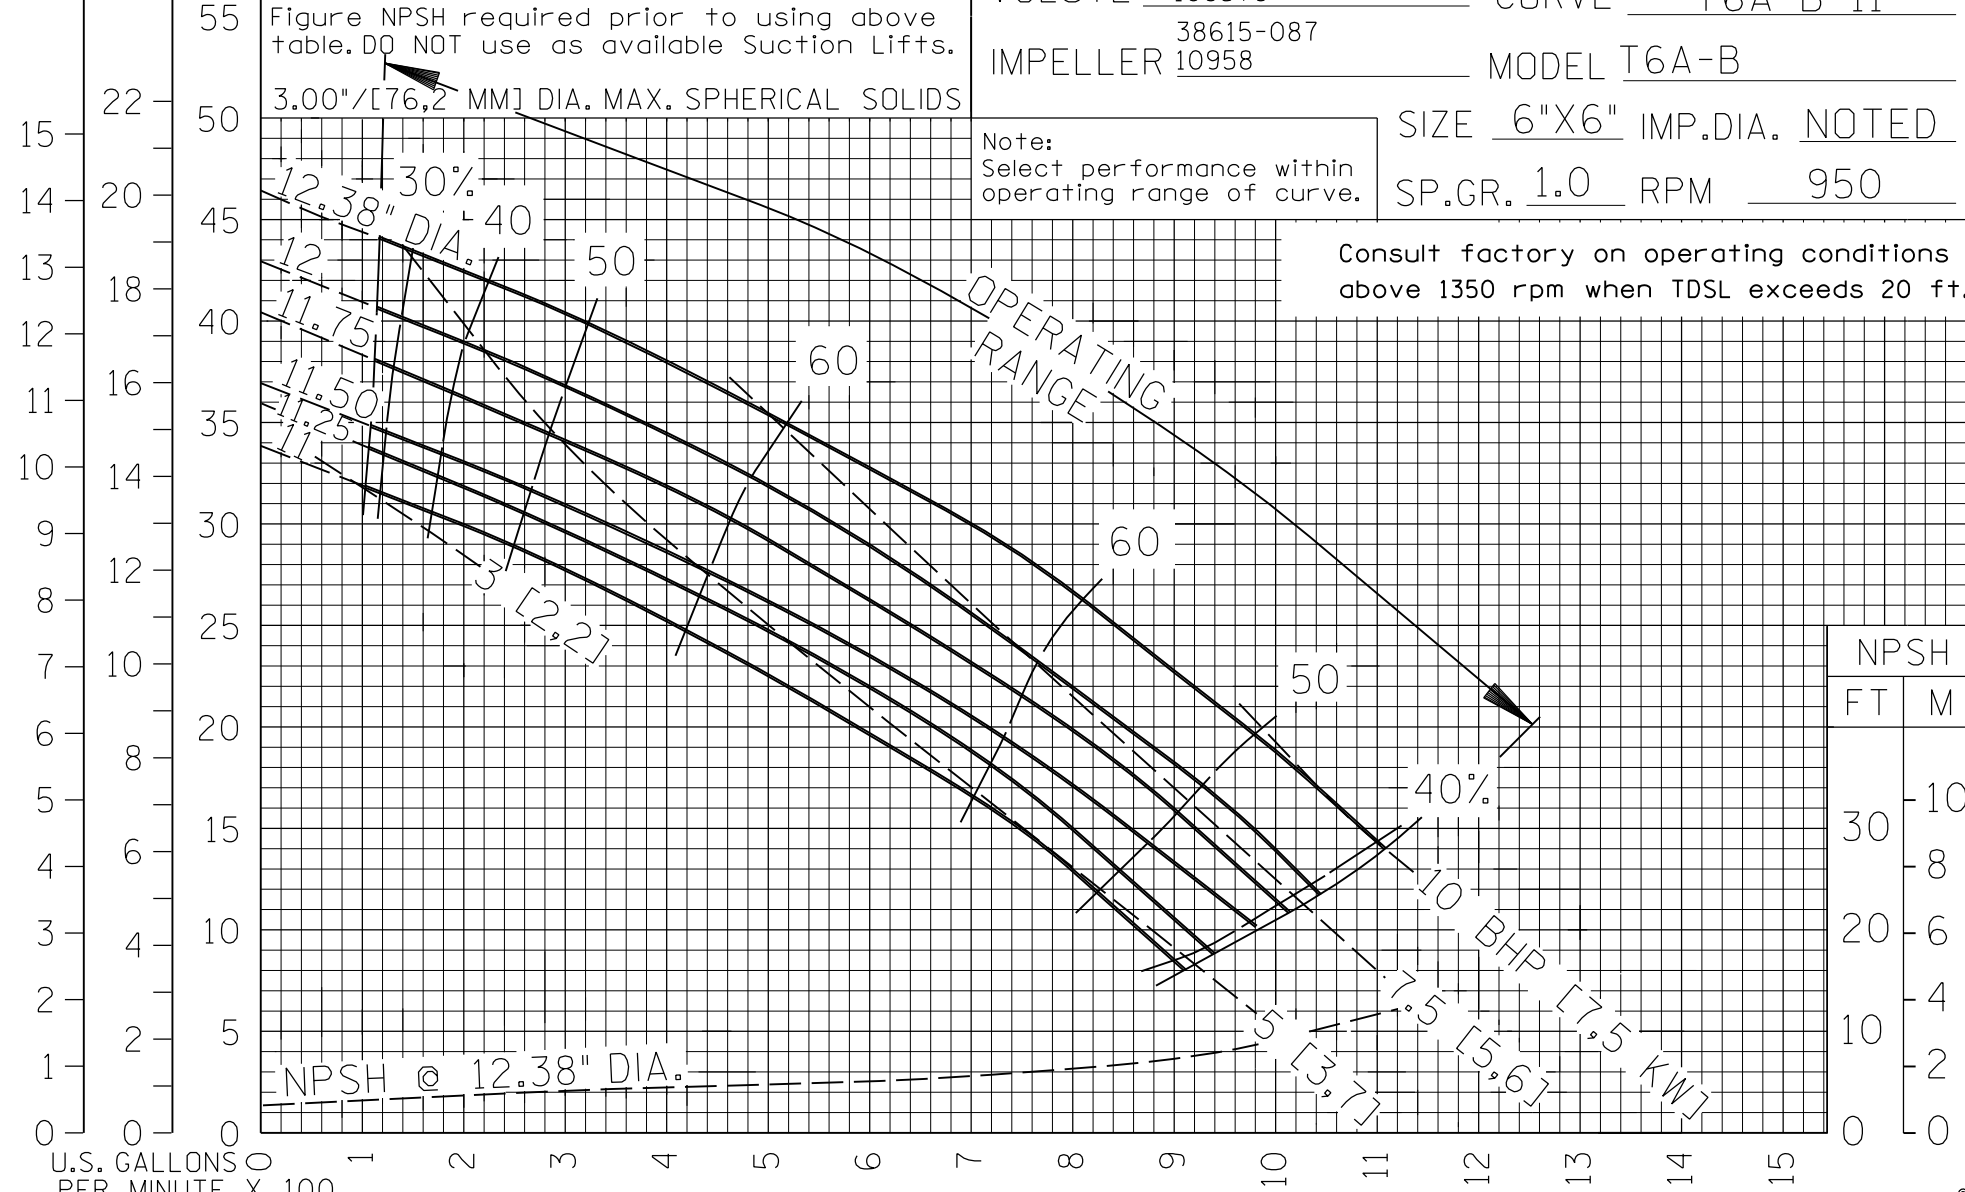

NPSH	
FT	M
30	10
20	6
10	3
0	0

FILE NO. t6ab.s11



T-8-09-R