

TOTAL HEAD

REPRIMING LIFTS

PERFORMANCE CURVE

RPM	650	750	850	950	1050	1150	1250	1350	1450	1550
FEET	5	7	9	10	11	12	14	15	18	19
METERS	1,5	2,1	2,7	3,1	3,4	3,7	4,3	4,6	5,5	5,8

VOLUTE 38224-705 CURVE T8A-B-11

IMPELLER 12349 MODEL T8A-B

SIZE 8"X8" IMP.DIA. 13"


SP.GR. 1.0 RPM NOTED

Figure NPSH required prior to using above table. DO NOT use as available Suction Lifts.

3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

Note:  
Select performance within operating range of curve.

Consult factory on operating conditions above 1200 rpm when TDSL exceeds 20 ft.

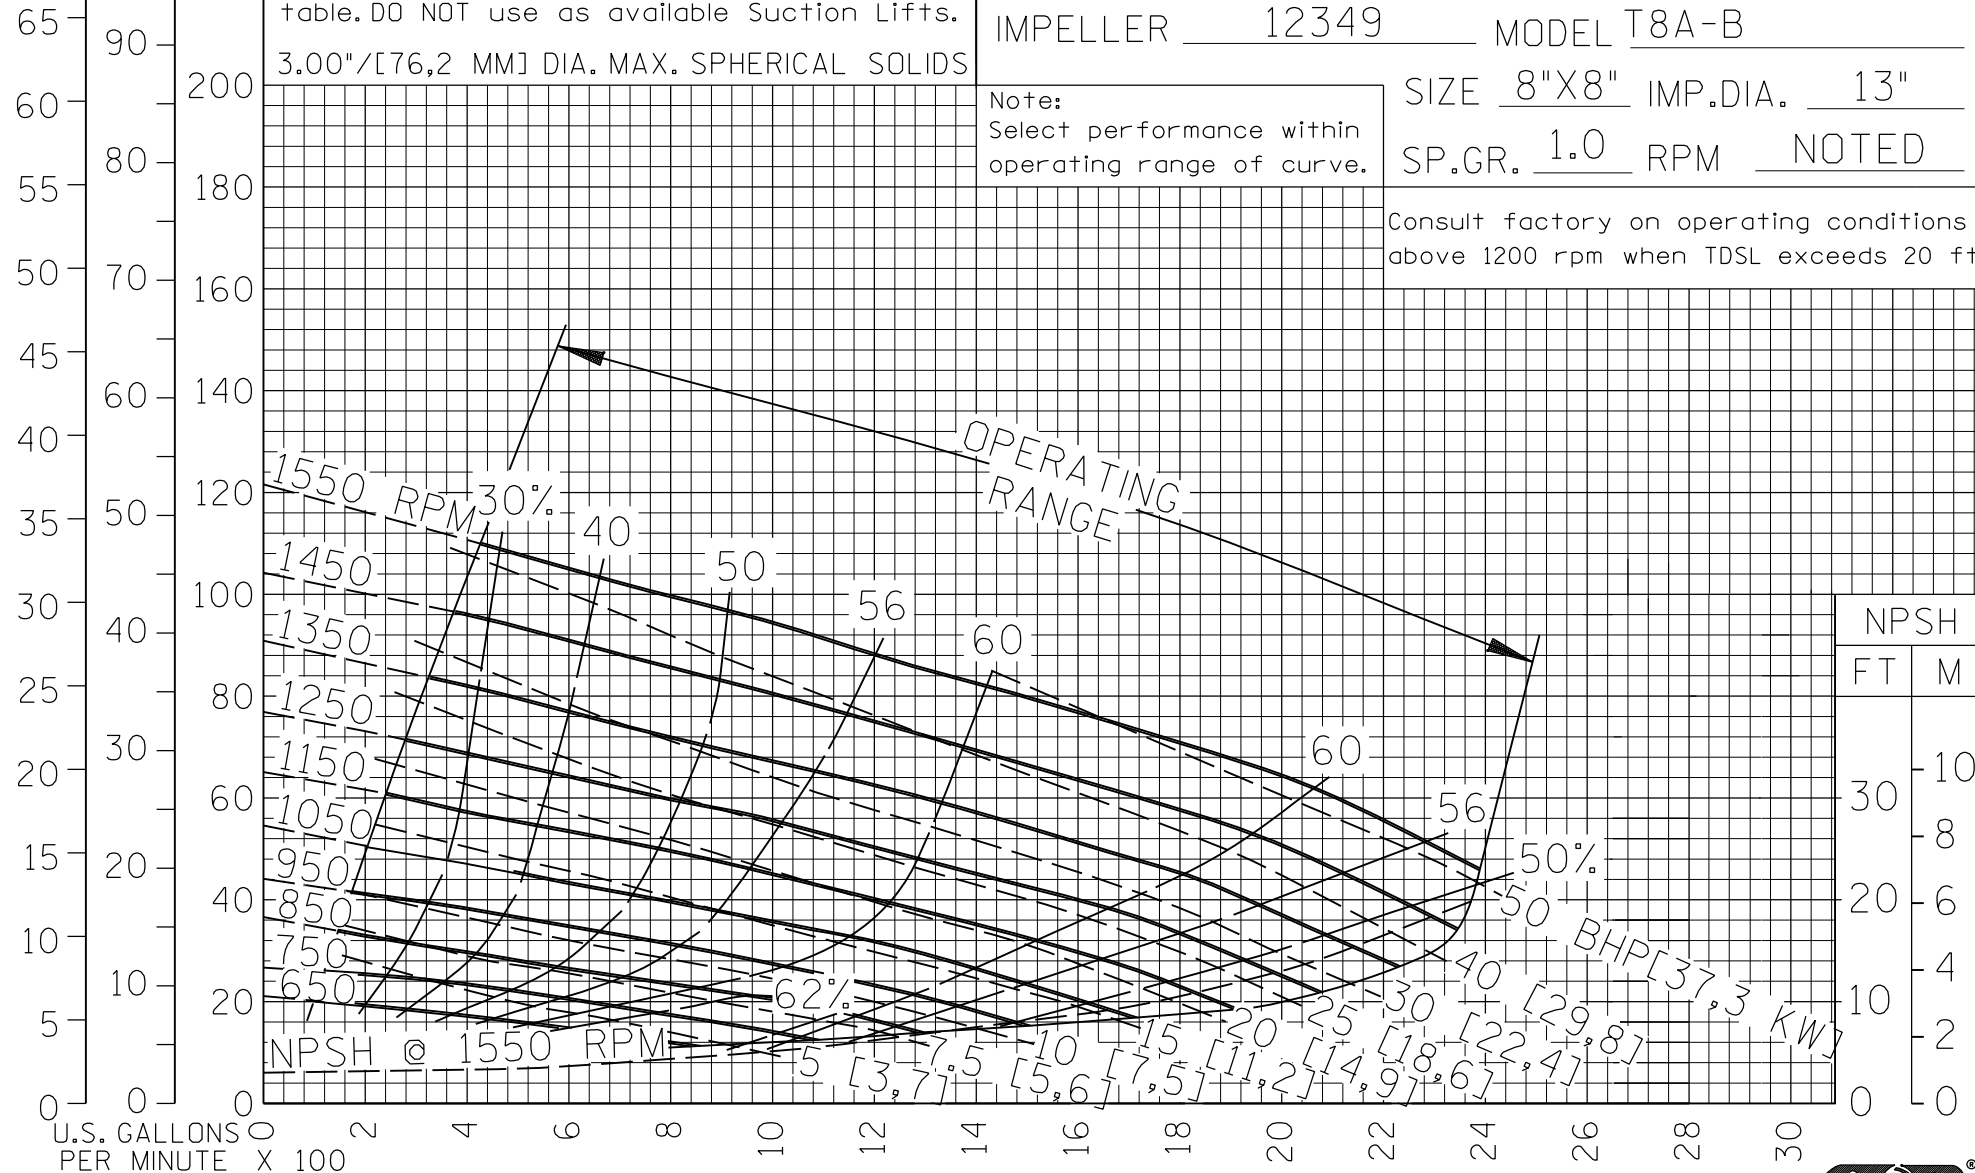

NPSH	
FT	M
30	10
20	6
10	3
0	0

FILE NO. t8ab.s11



T-9-99-R