

TOTAL HEAD

REPRIMING LIFTS

RPM	650	750	850	950	1050	1150	1250	1350	1450
FEET	8	10	13	16	18	19	21	23	24
METERS	2,4	3,1	4	4,9	5,5	5,8	6,4	7	7,3

Figure NPSH required prior to using above table.
DO NOT use as available Suction Lifts.

3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE

VOLUTE 38224-705 CURVE T8A-B-4


IMPELLER 12349 MODEL T8A-B

Note:
Select performance within
operating range of curve.

SIZE 8"X8" IMP.DIA. 14.25"

SP.GR. 1.0 RPM NOTED

Consult factory on operating conditions
above 1200 rpm when TDSL exceeds 20 ft.

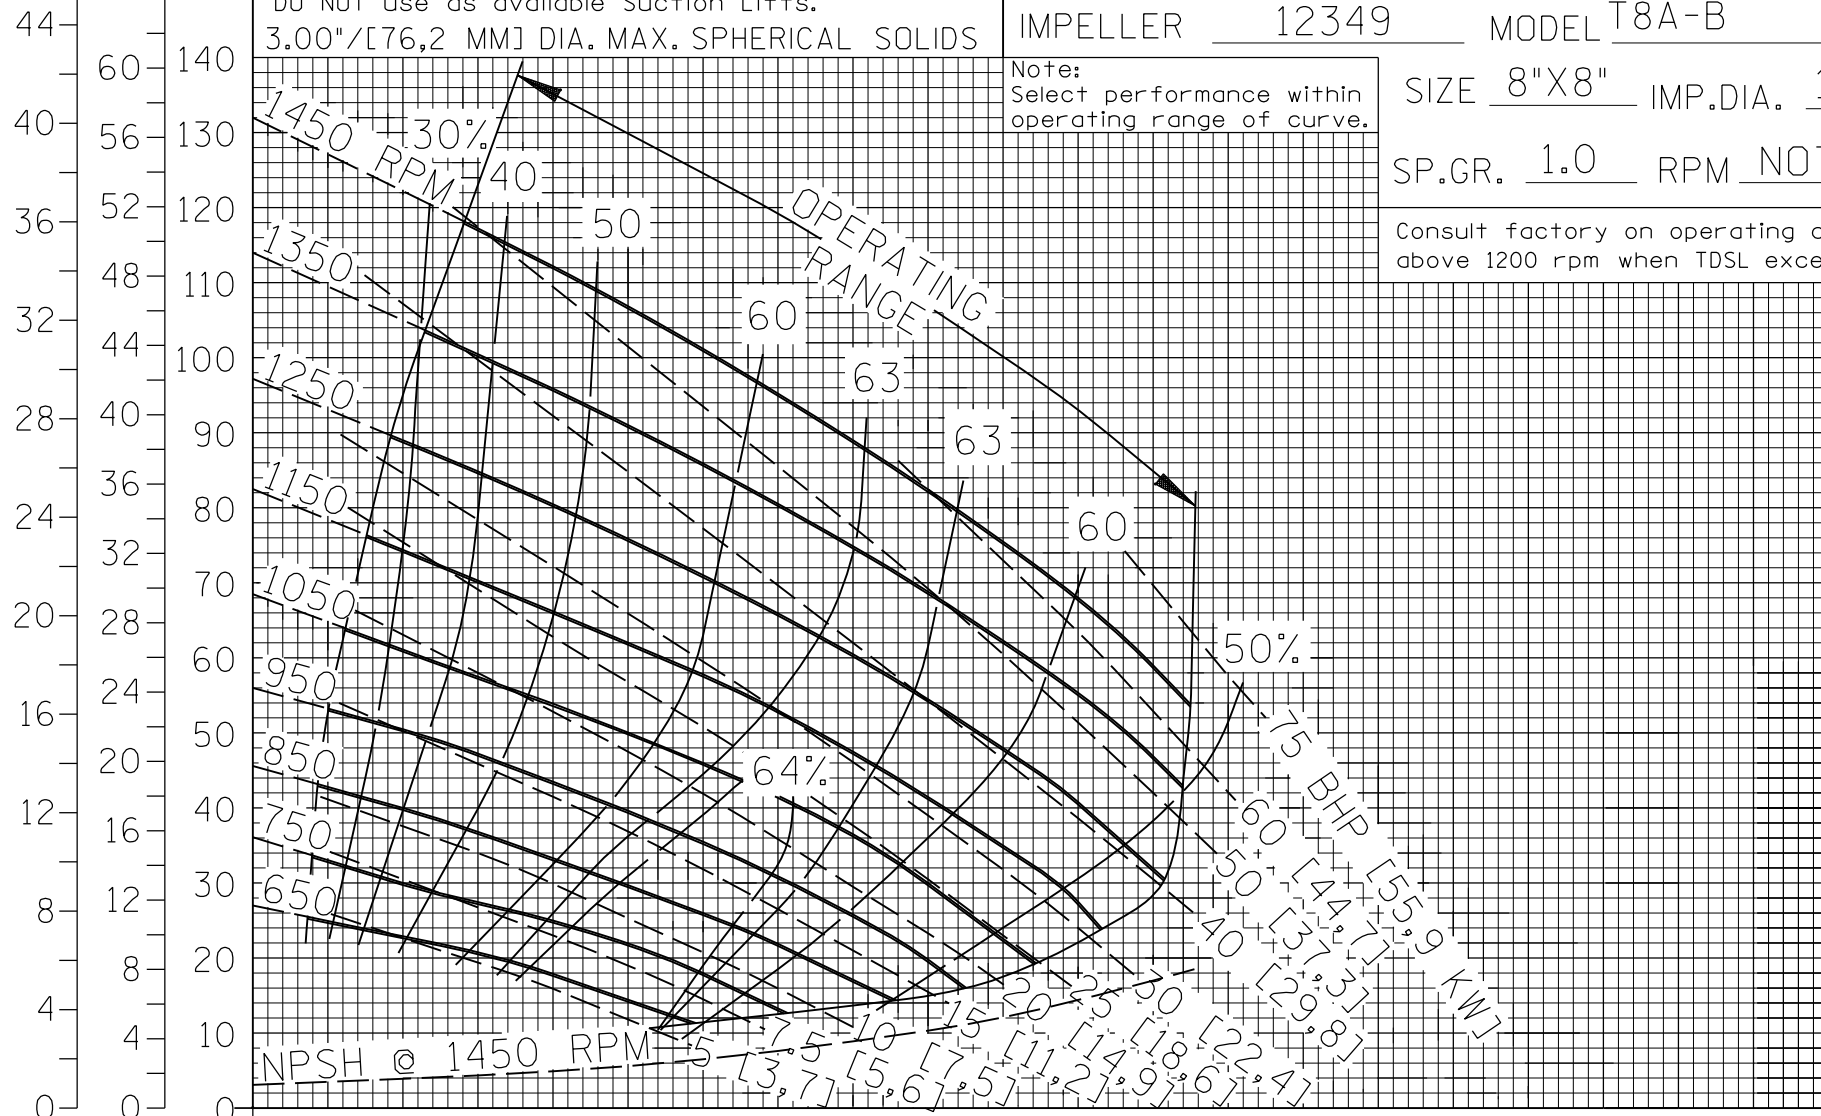

NPSH	
FT	M
10	3
8	2.4
6	1.8
4	1.2
2	0.6
0	0

FILE NO. t8ab.s04



T--5-99-R