Basic Pedestal



Standard Centrifugal Pump Model VGH4D31-B

Size 5" x 4"

PUMP SPECIFICATIONS

Size: 5" x 4" (127 mm x 102 mm) Raised Face Flanges.

Casing: Ductile Iron.

Maximum Operating Pressure 184 psi (1269 kPa).*

Enclosed Type, Six Vane Impeller: Gray Iron 40.

Handles 5/8" (18 mm) Diameter Spherical Solids.

Impeller Shaft: Steel 1045.

Two Replaceable Wear Rings: Gray Iron 25.

Seal Plate: Ductile Iron. Bypass Flush Piping.

Bearing Housing: Gray Iron 25.

Radial Bearing: Open Cylindrical Roller.

Thrust Bearing: Open Double Row Ball.

Bearing Lubrication: SAE 30 Non-Detergent Oil.


Gaskets: Nitrile Rubber.


Hardware: Standard Plated Steel. **Bearing Housing Level Oiler.**

Optional Equipment: Strainer. NPT Suction and Discharge Flanges. Discharge Check Valve. Consult Factory for Optional Seals.

*Consult Factory for Applications Exceeding Maximum Pressure and/or Temperature Indicated.



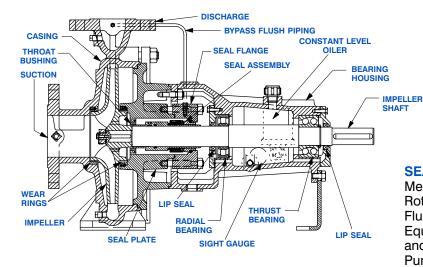



SEAL DETAIL

Mechanical, Self-Lubricated. Silicon Carbide Rotating and Stationary Faces. Fluorocarbon Elastomers (DuPont Viton[®] or Equivalent). Stainless Steel 316 Shaft Sleeve and Spring. Maximum Temperature of Liquid Pumped, 160°F (71°C).*



GORMAN-RUPP PUMPS

www.grpumps.com

Specifications Subject to Change Without Notice


Printed in U.S.A.


Specification Data

SECTION 70, PAGE 821

APPROXIMATE DIMENSIONS and WEIGHTS

NET WEIGHT: 440 LBS. (200 KG.) SHIPPING WEIGHT: 470 LBS. (213 KG.) EXPORT CRATE SIZE: 17 CU. FT. (0.5 CU. M.)

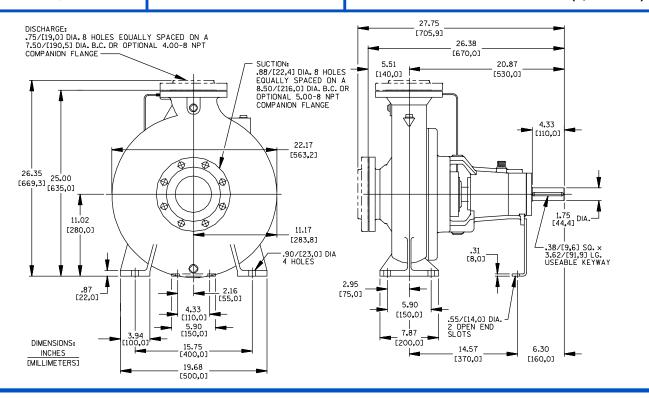

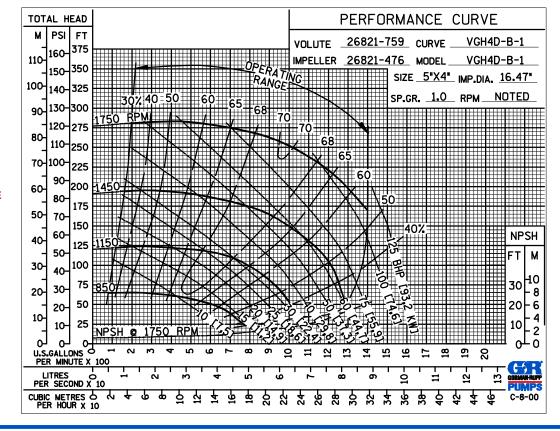

PERFORMANCE BASED ON WATER



GORMAN-RUPP PUMPS

www.grpumps.com

Specifications Subject to Change Without Notice


Printed in U.S.A.

Curve Data


Sec. 70

PAGE 821.1

JANUARY 2016

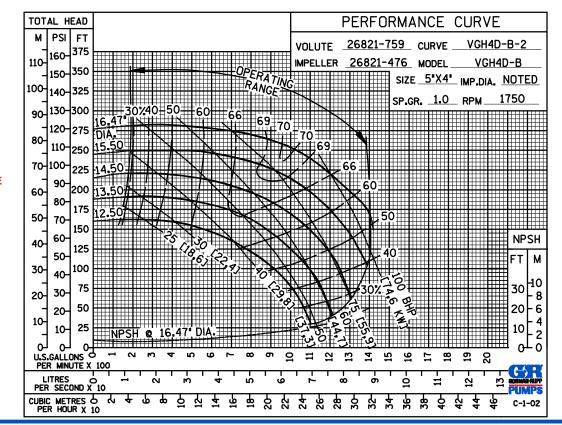

PERFORMANCE BASED ON WATER

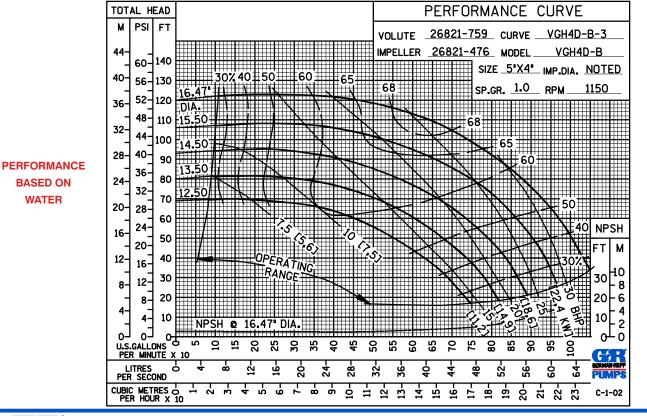

PUMPS

BASED ON

WATER

GORMAN-RUPP PUMPS

www.grpumps.com

Specifications Subject to Change Without Notice

Printed in U.S.A


Sec. 70

PAGE 821.2


JANUARY 2016



WATER

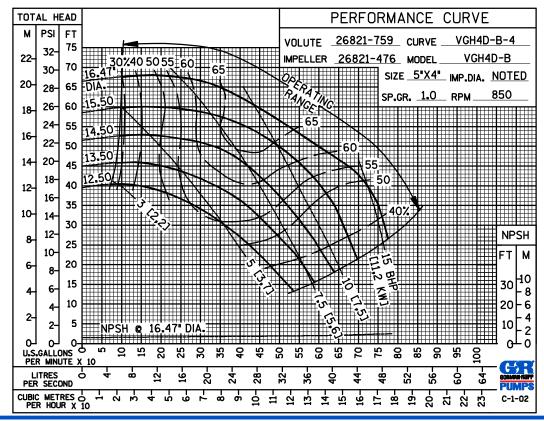

50 HERTZ PERFORMANCE BASED ON WATER

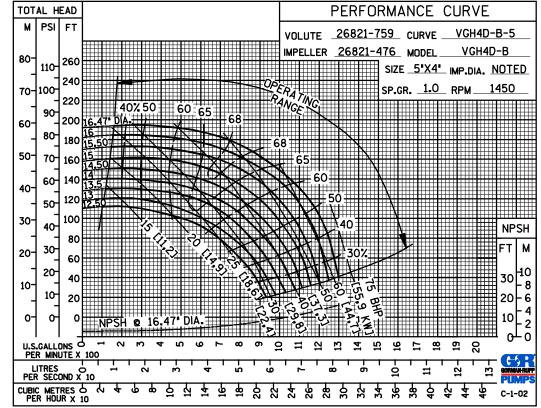



GORMAN-RUPP PUMPS

www.grpumps.com

Specifications Subject to Change Without Notice

Printed in U.S.A

Curve Data

Sec. 70

12-


PUMPS

C-1-02

宀

36-

PAGE 821.3 JANUARY 2016

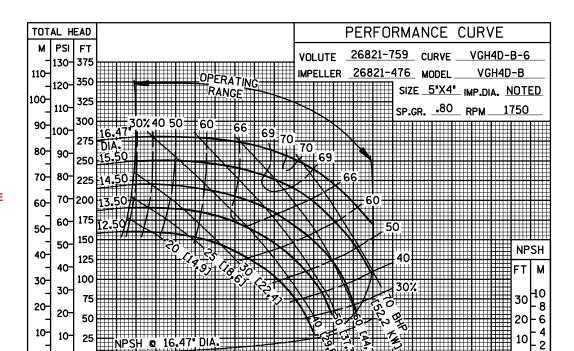

PERFORMANCE BASED ON PETROLEUM

U.S.GALLONS PER MINUTE X 100

LITRES PER SECOND X 10

CUBIC METRES & A



GORMAN-RUPP PUMPS

www.grpumps.com

Specifications Subject to Change Without Notice

Printed in U.S.A.