

TOTAL HEAD

M  
90  
80  
70  
60  
50  
40  
30  
20  
10  
0


PSI  
130  
120  
110  
100  
90  
80  
70  
60  
50  
40  
30  
20  
10  
0

FT  
300  
280  
260  
240  
220  
200  
180  
160  
140  
120  
100  
80  
60  
40  
20  
0

PERFORMANCE BASED ON OPERATION  
WITH HSP-KDI2504TCR OR HSP-D914L40R  
POWER UNIT SET AT 2300 RPM

PERFORMANCE CURVE

VOLUTE 26832-321 CURVE HSV4A-HYD-1  
 IMPELLER 26832-316 MODEL HSV4A-HYD  
 SIZE 4" IMP.DIA. 11"  
 SP.GR. 1.0 RPM VARIABLE

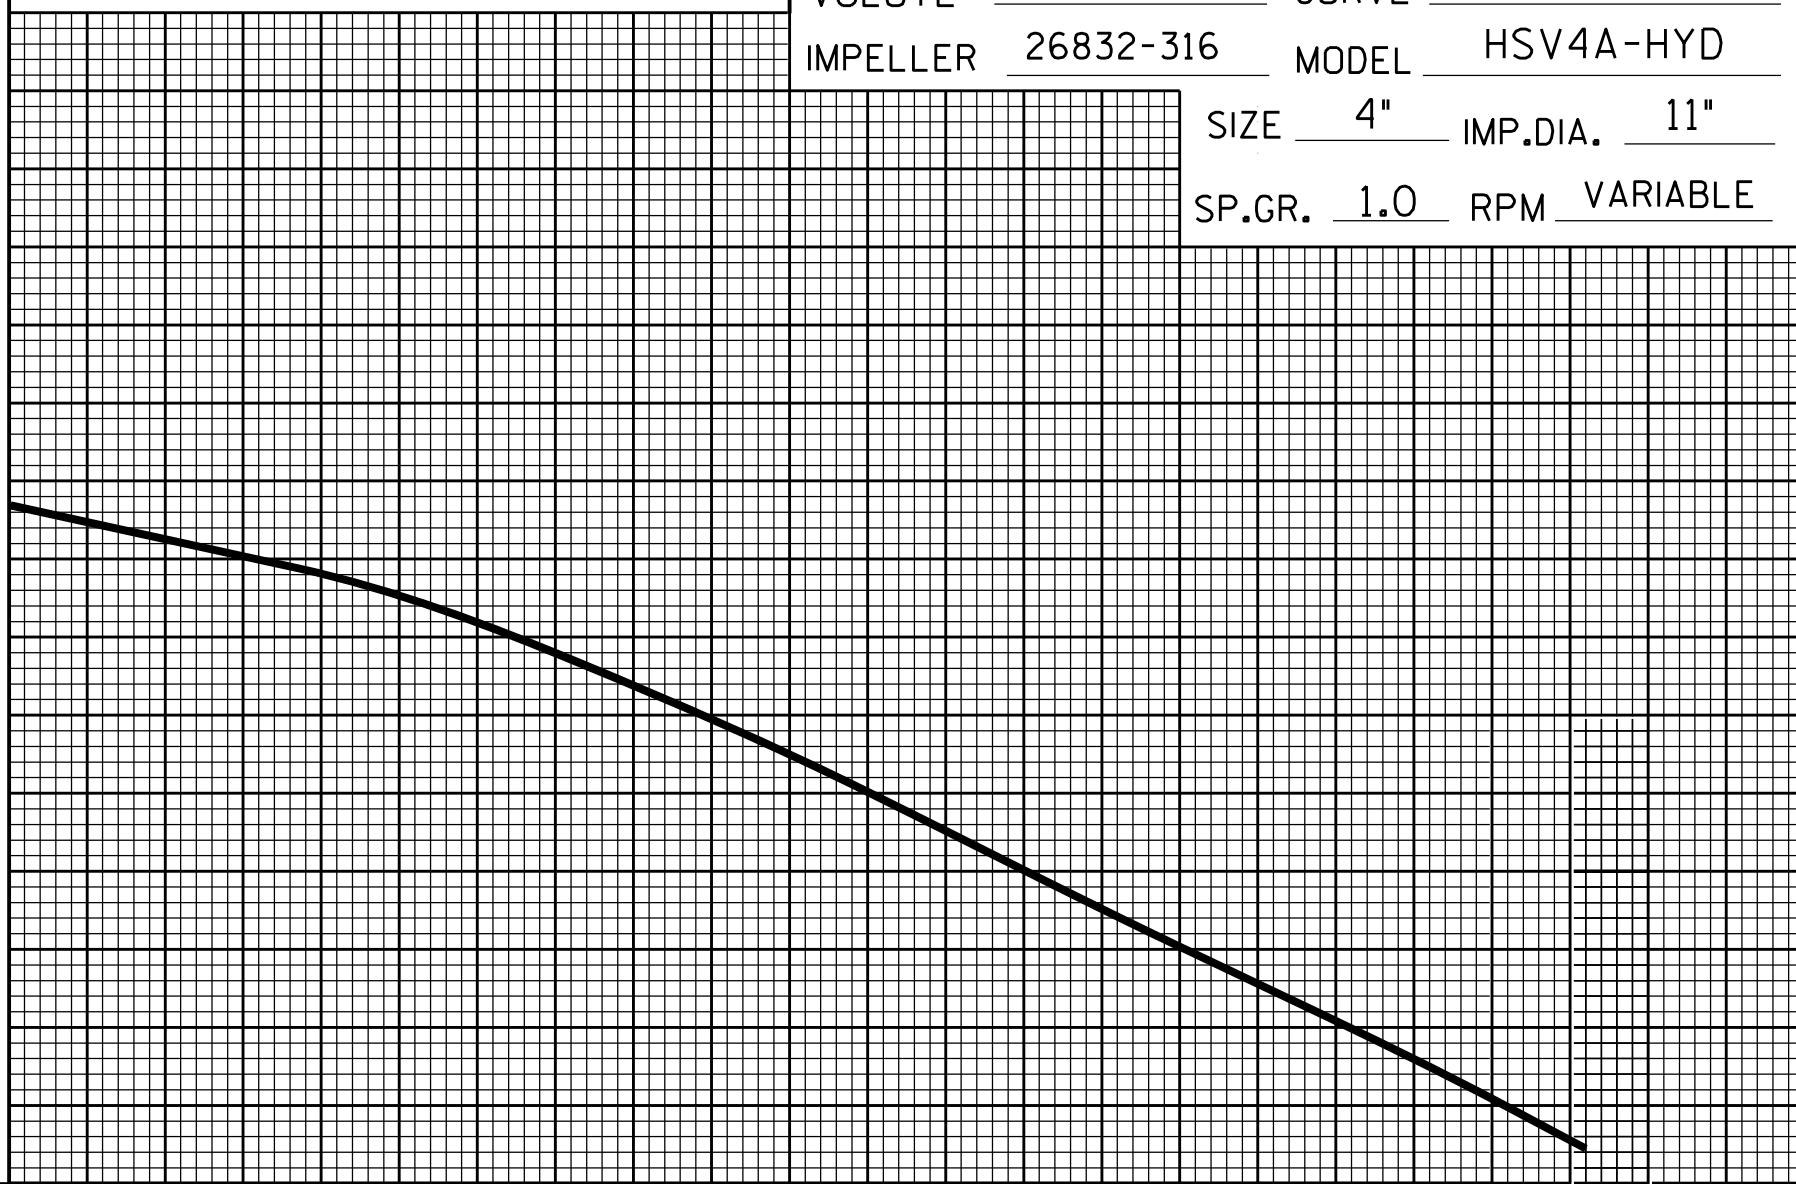

U.S. GALLONS PER MINUTE X 10

LITRES PER SECOND

CUBIC METRES PER HOUR X 10

0 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100

0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23



C-3-23-R