

TOTAL HEAD


M  
PSI  
FT

44  
60  
40  
56  
36  
52  
48  
32  
44  
28  
40  
24  
36  
20  
28  
16  
24  
20  
12  
16  
8  
12  
4  
8  
4  
0

PERFORMANCE BASED ON OPERATION WITH HSP-C3.4BT, HSP-D914L4, OR HSP-KDI2504TCR POWER UNIT SET AT 2300 RPM

PERFORMANCE CURVE

VOLUTE 26832-421 CURVE HSV6A-HYD-1  
 IMPELLER 26832-316 MODEL HSV6A-HYD  
 SIZE 6" IMP.DIA. 11"  
 SP.GR. 1.0 RPM VARIABLE

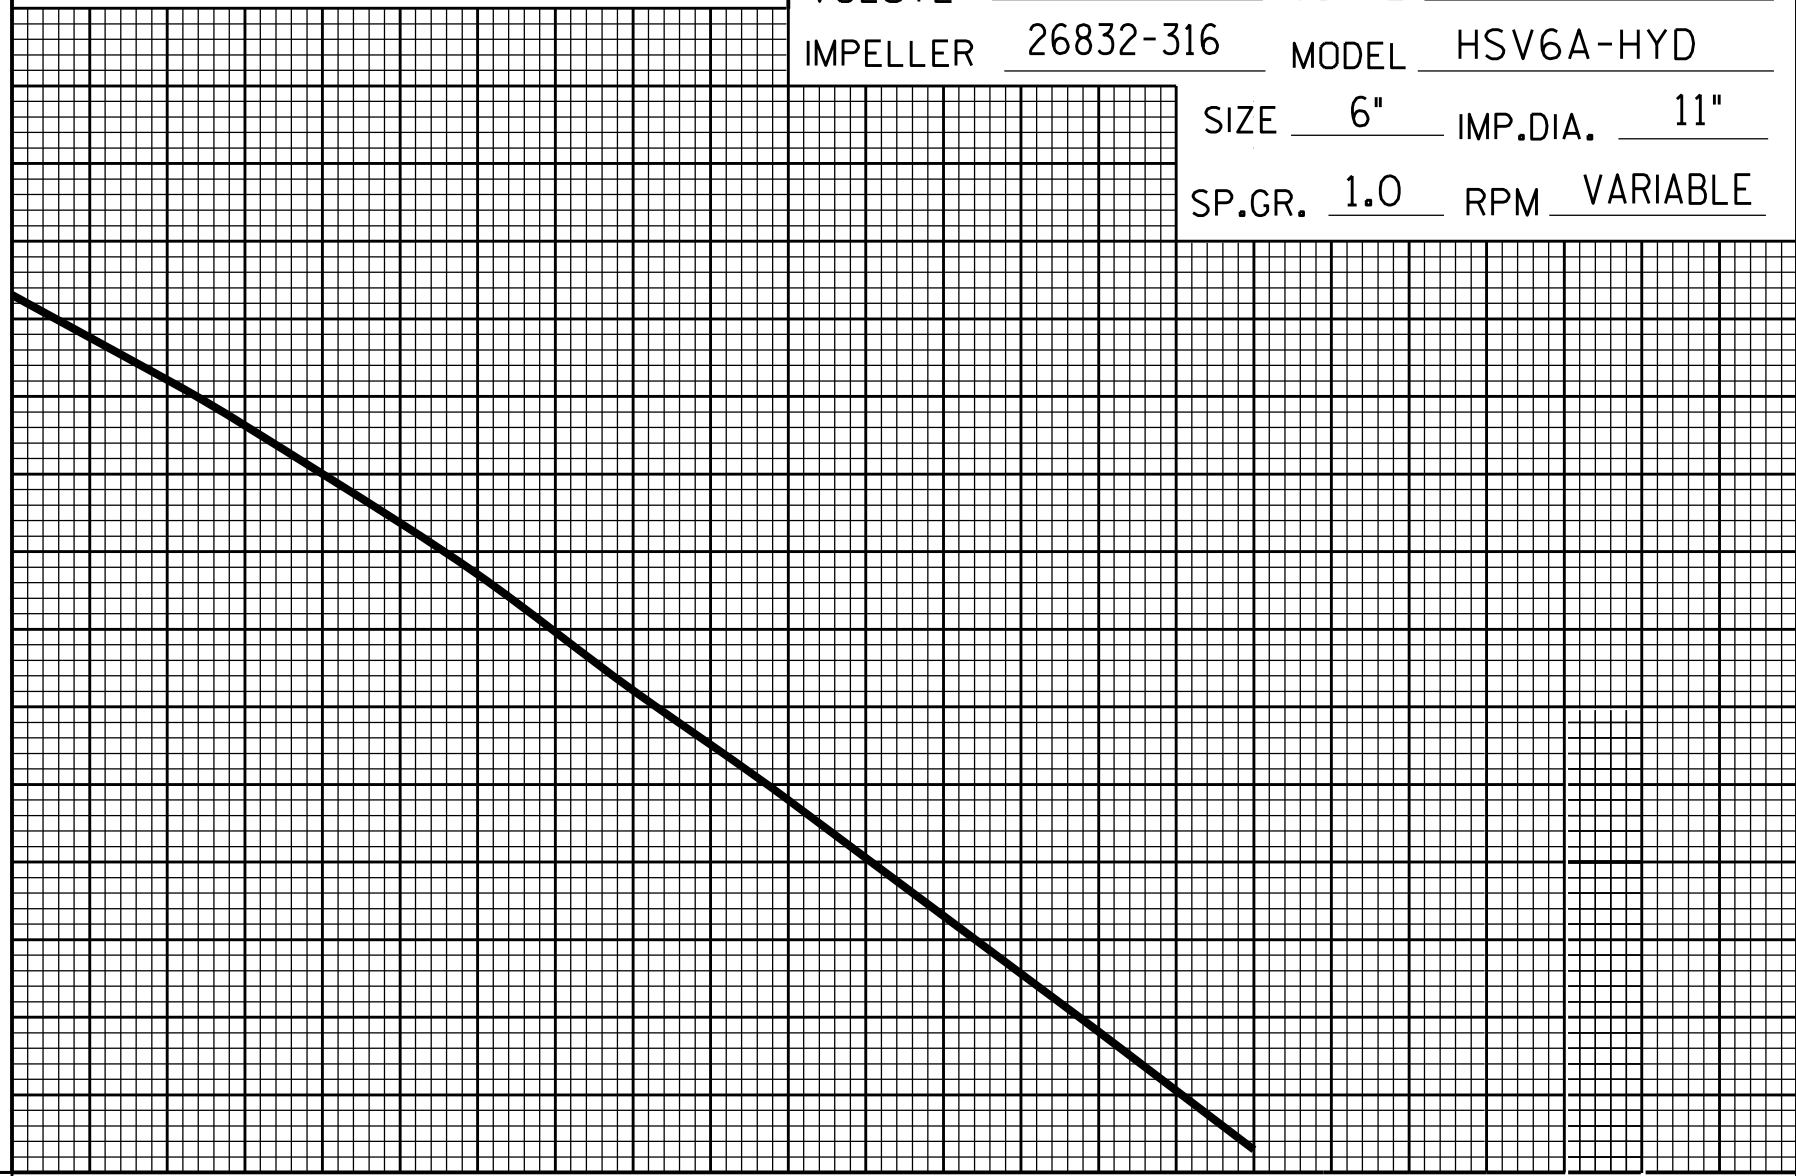

U.S.GALLONS PER MINUTE X 100

LITRES PER SECOND X 10

CUBIC METRES PER HOUR X 10

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20

0 1 2 3 4 5 6 7 8 9 10 11 12 13

0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44 46



C-3-23-R