

TOTAL HEAD

PERFORMANCE BASED ON OPERATION
WITH HSP-KDI2504TCR OR HSP-D914L40R
POWER UNIT SET AT 2300 RPM


PERFORMANCE CURVE

VOLUTE 26832-521 CURVE HSV6B-HYD-1
 IMPELLER 26832-516 MODEL HSV6B-HYD
 SIZE 6" IMP.DIA. 9 1/4"
 SP.GR. 1.0 RPM VARIABLE

M
22
20
18
16
14
12
10
8
6
4
2
0

PSI
32
30
28
26
24
22
20
18
16
14
12
10
8
6
4
2
0

FT
75
70
65
60
55
50
45
40
35
30
25
20
15
10
5
0

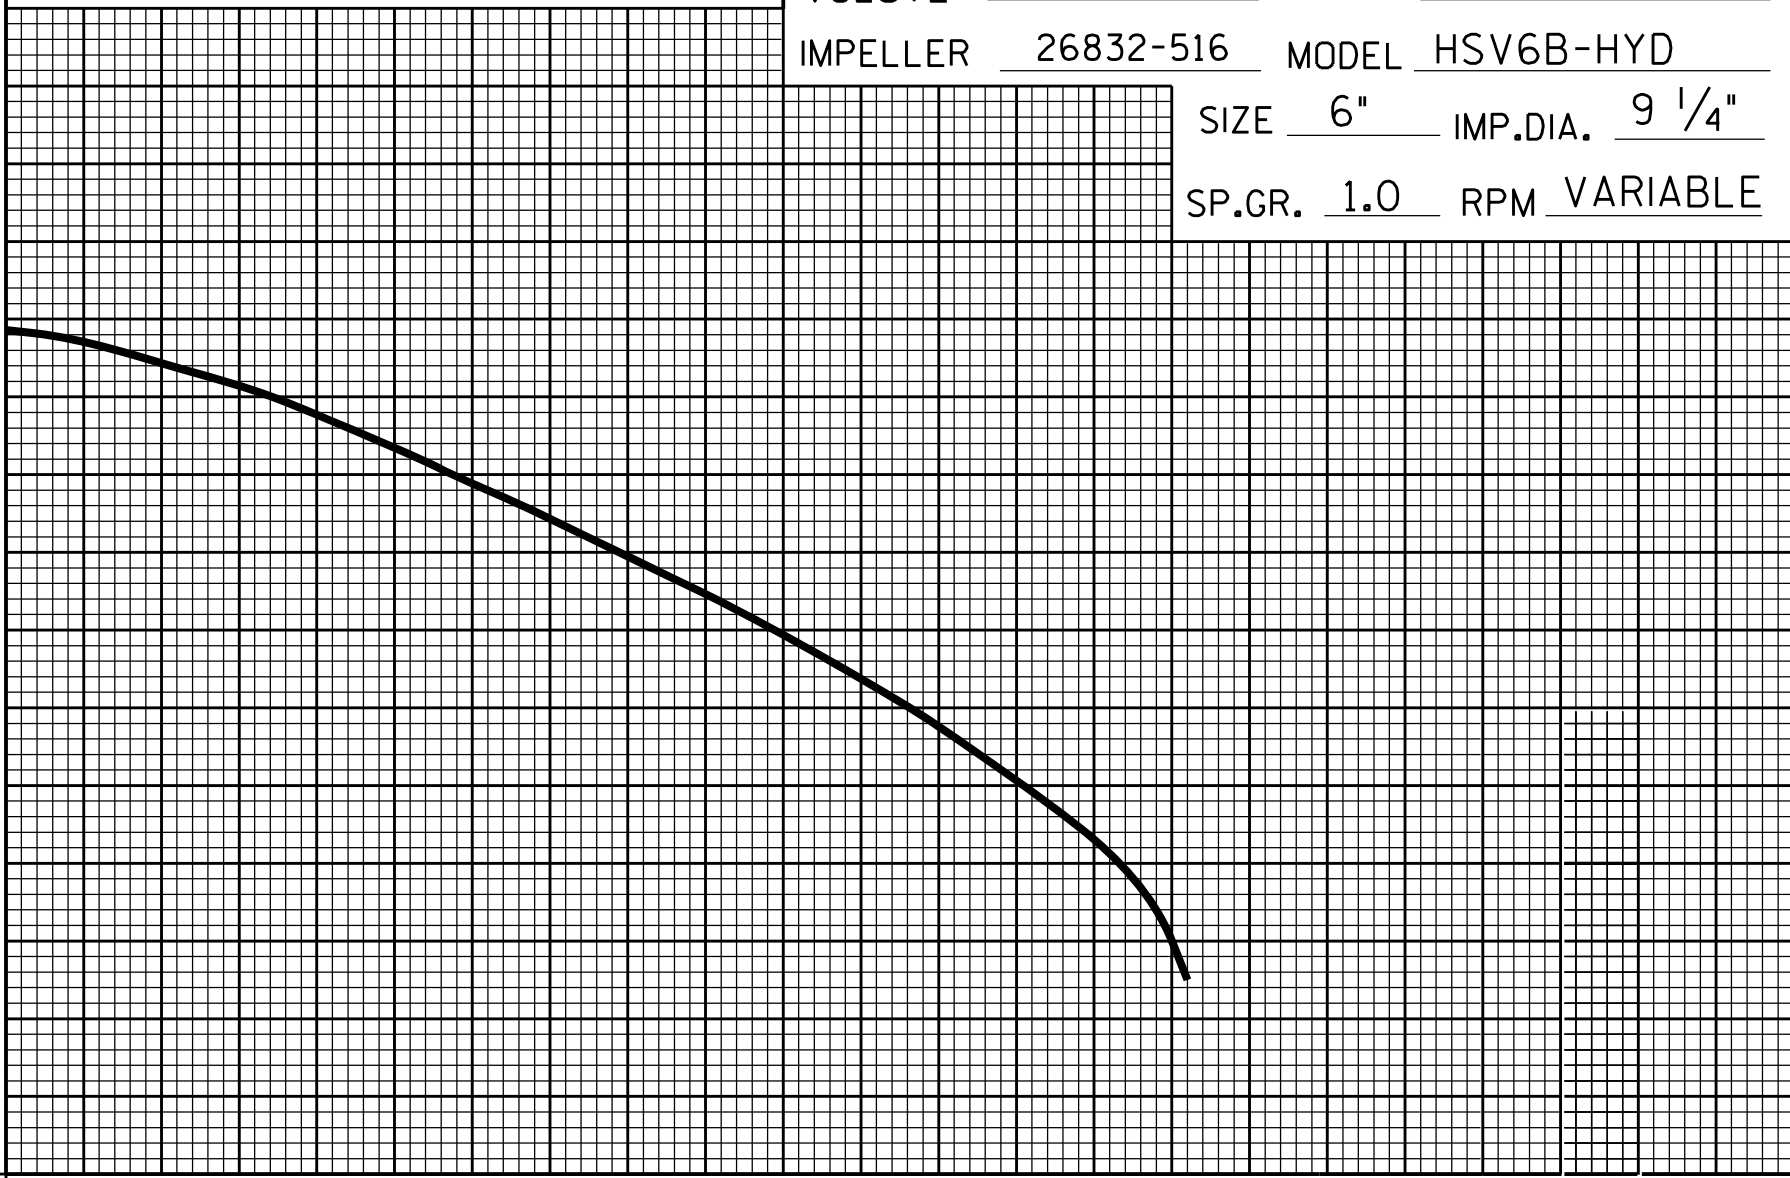

U.S. GALLONS
PER MINUTE X 100

LITRES
PER SECOND X 10

CUBIC METRES
PER HOUR X 10

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20

0 1 2 3 4 5 6 7 8 9 10 11 12 13

0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44 46

