

TOTAL HEAD

3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE

CURVE FOR SERIES APPLICATION ONLY & SHOULD NOT BE USED FOR SINGLE PUMP PERFORMANCE

VOLUTE 10957E  
10957C CURVE T6A-B-13  
 IMPELLER 38615-087  
10958 MODEL T6A-B

Performance shown does not include any interconnecting piping


SIZE 6"X6" IMP.DIA. 12.38"

SP.GR. 1.0 RPM NOTED

NOTE: Series operation is limited by the operating pressure & NPSH requirement of a single pump. See single pump curve for NPSH, EFF., & HP.

Consult factory on operating conditions above 1350 rpm when TDSL exceeds 20 ft.

2 PUMPS IN SERIES

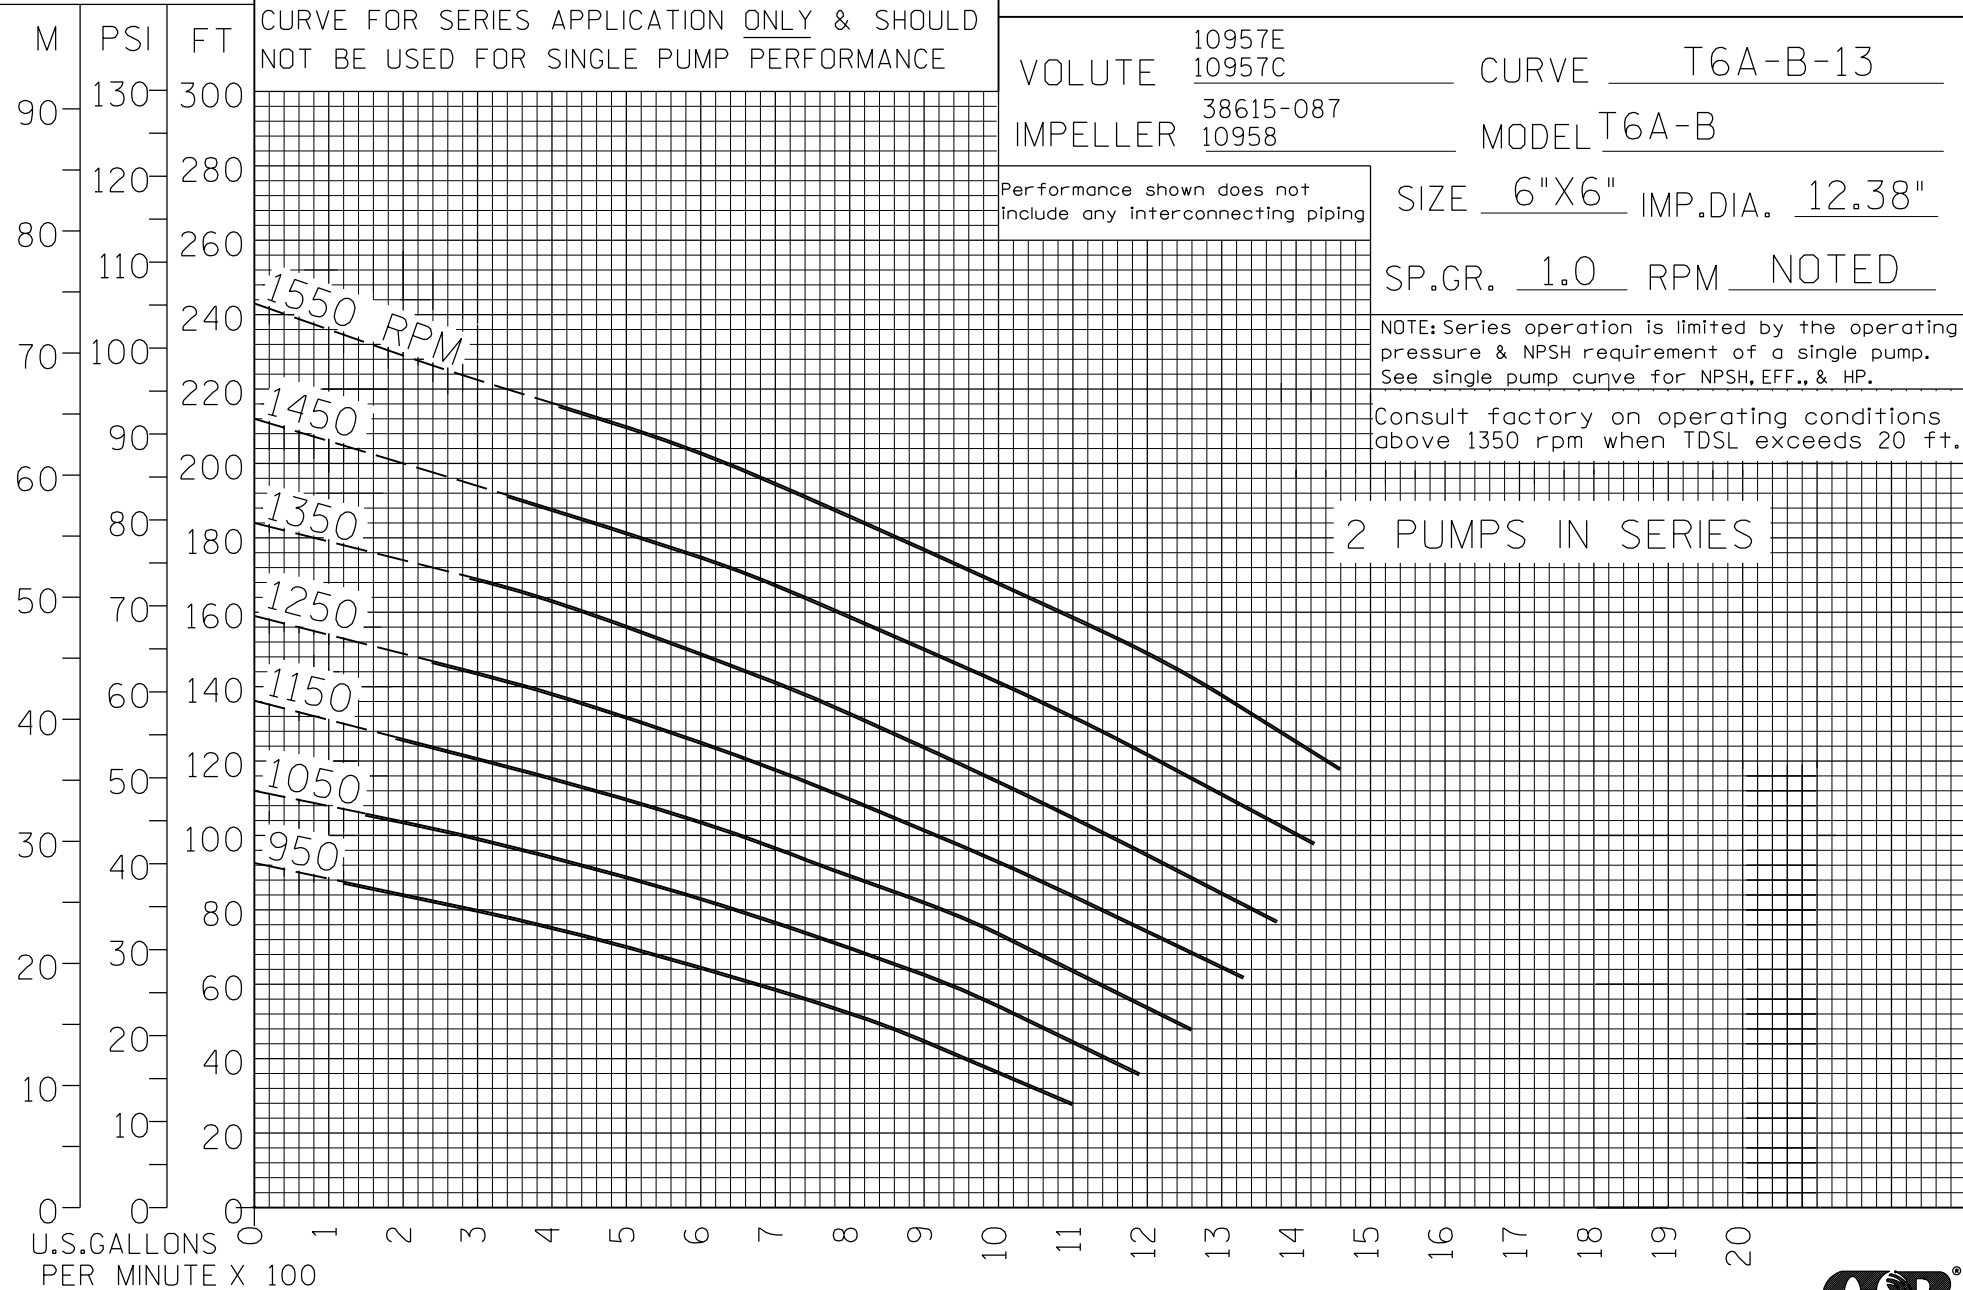

FILE NO. t6ab.s13



C-8-09-R