

TOTAL HEAD

REPRIMING LIFTS

RPM	650	750	850	950	1050	1150	1250	1350	1450	1550
FEET	8	9	10	12	16	17	18	20	22	
METERS	2,4	2,7	3,1	3,7	4,9	5,2	5,5	6,1	6,7	

PERFORMANCE CURVE


VOLUTE 10957E  
 10957C CURVE T6A-B-5  
 38615-087  
 IMPELLER 10958 MODEL T6A-B

Note:  
 Select performance within  
 operating range of curve.

SIZE 6"X6" IMP.DIA. 12"  
 SP.GR. 1.0 RPM NOTED

Consult factory on operating conditions  
 above 1500 rpm when TDSL exceeds 19 ft.

M PSI FT  
 44 60 140  
 40 56 130  
 36 52 120  
 48 110  
 32 44 100  
 28 40 90  
 36 80  
 24 32 70  
 20 28 60  
 16 24 50  
 20 40  
 12 16 30  
 8 12 20  
 4 8 10  
 0 0 0

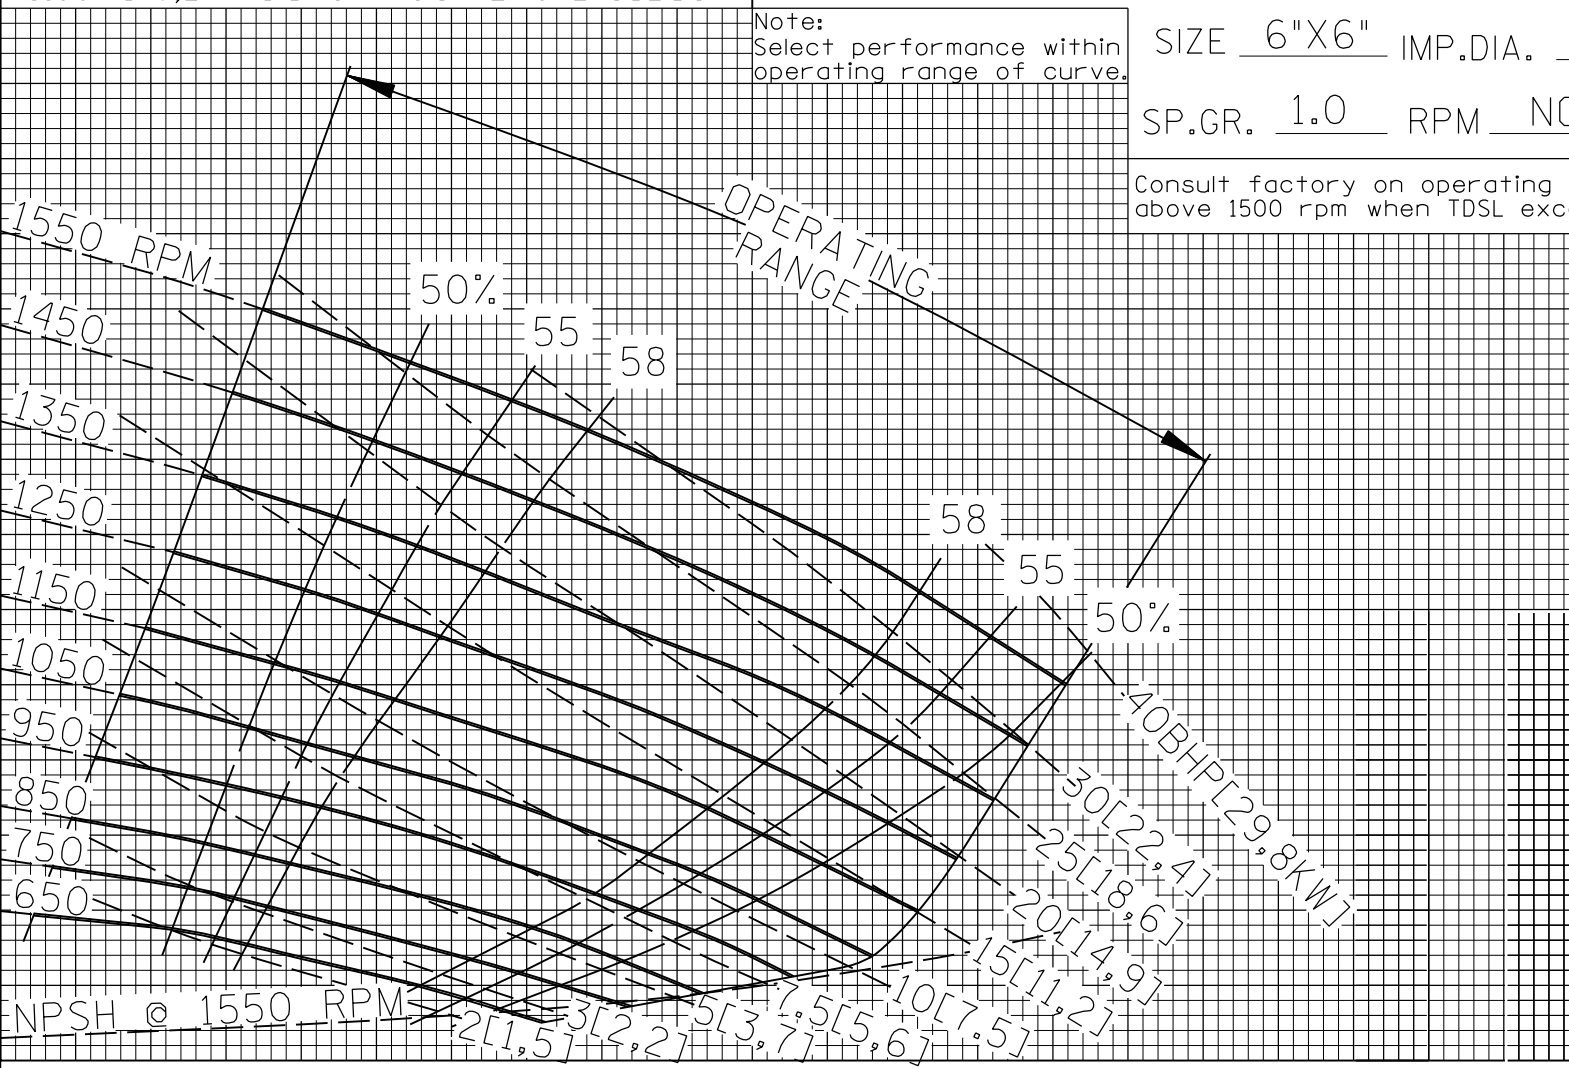

NPSH

FT M  
 30 10  
 20 6  
 10 4  
 0 0

U.S.GALLONS PER MINUTE X 100

LITRES PER SECOND X 10

CUBIC METRES PER HOUR X 10

FILE NO. t6ab.s05



T-1-07-R