



Submersible Pump

Electric Motor Driven

Model SE1 1/2F3–E.33 12V

Size 1 1/2”



PUMP SPECIFICATIONS

Pump Casing: Aluminum
Impeller: Aluminum.
Suction Cover: Aluminum.
Motor Housing: Aluminum.
Rotor Shaft: Stainless Steel.
Upper and Lower Bearings: Sealed Single Row Ball.
Gaskets: Vegetable Fiber.
O-Rings: Buna-N.
Internal Hardware: Standard Plated Steel.
External Hardware: Standard Plated Steel.
Carrying Handle: Aluminum.
Seal: Buna-N Mechanical Seal with Carbon Ceramic Faces.
Maximum Temperature: 104° F
Strainer: Steel Strainer Built Into Pump with 0.38“(9,6 mm) Dia. Openings.

Standard Equipment: Built-In Thermal Overload Protection, Manual On/Off switch.


Optional Equipment: Hose Kit No. 48782–001, Includes: Lockable Thermoplastic Carrying Case, 24 Ft. (7,3 m) of 1-1/4” (32 mm) Reinforced Plastic Discharge Hose, 1-1/2” to 1-1/4” NPT Discharge Reducer.



MOTOR/CABLE SPECIFICATIONS

MOTOR: 1/3 HP; 2850 RPM; 12 Volt DC, 26 Amps; Operates approximately 60 Minutes on Fully Charged 55 amp–Hour Battery.

POWER CABLE: 30ft (9m) Insulated (PVC) Conductor Cables with Battery Clips.

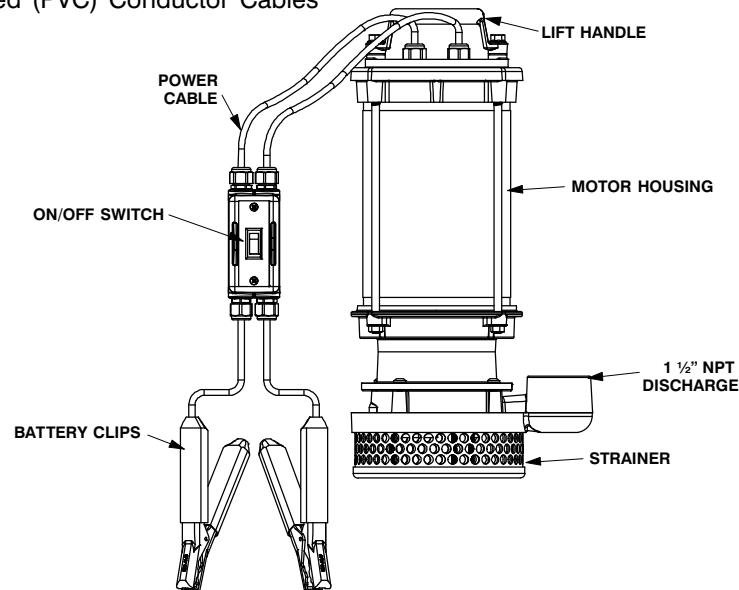

GORMAN-RUPP PUMPS

www.grpumps.com

Specifications Subject to Change Without Notice


Printed in U.S.A.

Specification Data


SECTION 130, PAGE 192

OVERALL DIMENSIONS
and
WEIGHTS APPROXIMATE

PUMP & CABLE NET WEIGHT: 35 LBS. (15,9 KG.)
CARTONED WEIGHT: 41 LBS. (18,6 KG.)
CARTON: 1 CU. FT. (0,03 CU. M.)

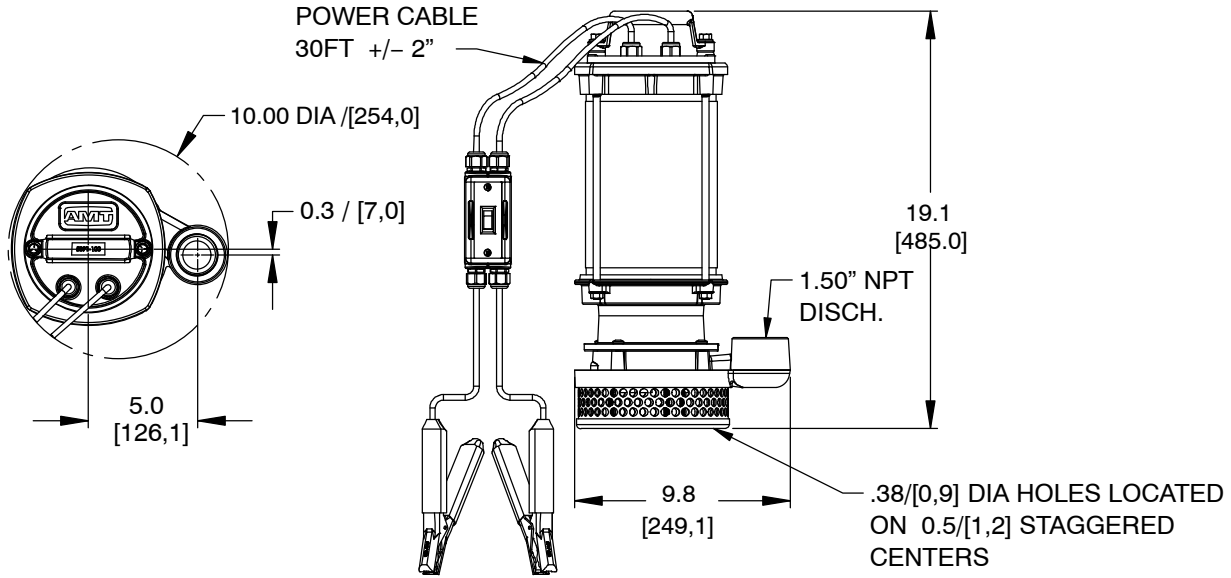

SE1 1/2F3-E.33 12V 1/3 HP

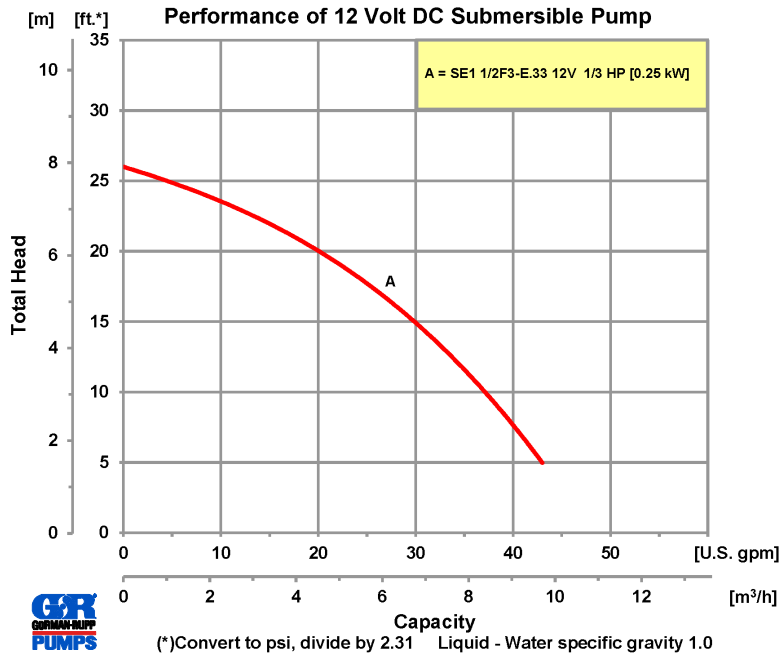

GORMAN-RUPP PUMPS

www.grpumps.com

Specifications Subject to Change Without Notice

Printed in U.S.A.